


Creating unprecedented products with unprecedented performance.



*Service, Engineering, Delivery...
Quick and Dependable!*

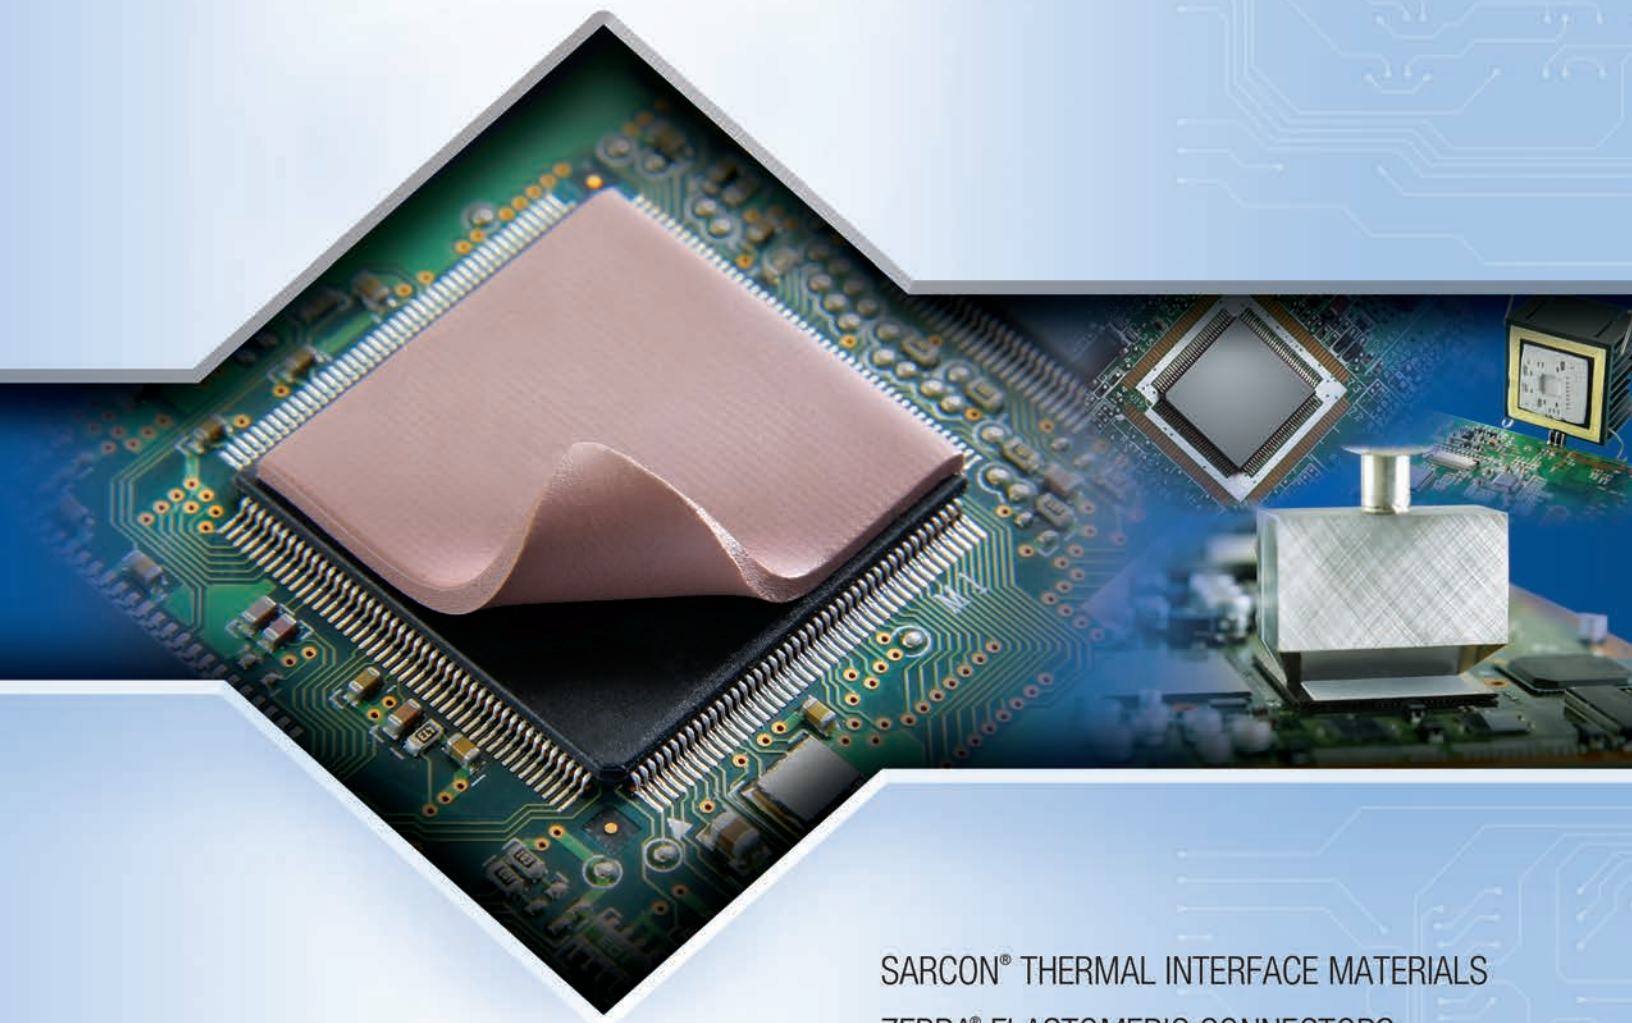

SARCON® THERMAL INTERFACE MATERIALS
ZEBRA® ELASTOMERIC CONNECTORS
CUSTOM SILICONE EXTRUSIONS

FUJIPOLY.COM

FUJIPOLY

TABLE of CONTENTS



1

Fujipoly® Introduction

2-11

Zebra® Elastomeric Connectors

Complete selection of low resistance, high conductivity, high density silicone connectors

12-35

SARCON® Thermal Management Materials

Thermally conductive silicone components in sheets, rolls, die-cuts, pads, sleeves and cases

12 Technical Overview, Products

13 Sarcon® Thin Film Profiles

14-23 Thermal Gap Filler Pads

24 Sarcon® GR-Pm, XR-Pe Silicone Putty

25 Sarcon® XR-Um, XR-Um-AL, XR-v, XR-v-AL, Silicone Putty

26 Sarcon® GR-Sd, GR-SL, Low Compression Force Gap Filler

27 Sarcon® Thermally Conductive Greases

28-31 Sarcon® SPG-15A, SPG-30A, SPG-20A, SPG-50A "Form in Place" Gap Filler

32 Sarcon® Non-Silicone Gap Filler

33 Sarcon® Thin Film Profiles in Rolls and Sheets

34 Sarcon® "Sleeve" Shape Thermal Extrusions

34 Sarcon® "Case" Shape Thermal Extrusions

35 Sarcon® Die-cut Gaskets

36

Fusible Tapes

Insulative and conductive self-fusing tapes

37

Custom Silicone Rubber Extrusions

Complex co-extruded shapes, gaskets and seals

38-45

Design Guidelines - All Products

Handy engineering and installation information

46

Engineering Notes

47

Ordering Information

Fujipoly® Locations and Distributors

Fuji Polymer Industries Co., Ltd.

Overseas Department

175 Kajiyashiki
Toyota, Aichi 4700533 JAPAN
tel: 81-565-65-1729 fax: 81-565-65-1857
e-mail: fujipoly@mx.fujipoly.co.jp
ISO9001 (Aichi Plant)

Fujipoly America Corp.

900 Milk Street
P.O. Box 119
Carteret, NJ 07008-0119
tel: 732.969.0100 fax: 732.969.3311
e-mail: info@fujipoly.com
web: www.fujipoly.com
ISO9001-2008

Fujipoly (Thailand) Co., Ltd.

55/8 Moo 13 Navanakorn Industrial Estate Phase 4
Phaholyothin Road, Klong Nueng, Klong Luang
Pathumthanee 12120 Thailand
tel: 66-2-529-2732 fax: 66-2-529-2223
e-mail: marketing@fujipoly.co.th
ISO9001 ISO14001

Fujipoly Europe Ltd.

Avant Business Centre, Unit 8
Third Avenue
Bletchley, Milton Keynes MK1 1DR U.K.
tel: 44-1-908-277800 fax: 44-1-908-277900
e-mail: sales@fujipolyeurope.co.uk

Fujipoly Singapore Pte, Ltd.

1001 Jalan Bukit Merah #02-17/20
Singapore 159455
tel: 65-6272 3766 fax: 65-6272 3577
e-mail: info@fujipoly.com.sg
ISO9001

Fujipoly Hong Kong Ltd.

Unit F & J, Block 1, 4/FI.
Kwai Tak Industrial Centre
15-33 Kwai Tak Street, Kwai Chung, N.T., Hong Kong
tel: 852-24283770 fax: 852-24899637
e-mail: info@fujipoly.com.hk

Fuji Malaysia Sdn.Bhd. (Malaysia Factory)

Plot 26, Phase 4, Free Industrial Zone,
Hilir Sungai Keluang 3, Bayan Lepas Penang, 11900 Malaysia
e-mail: info@fujipoly.com.my

Fujipoly China Ltd. (China Factory)

Gaobao Road, The First Industrial Park
Tutang Estate, Changping Town, Dongguan City,
Guangdong, 523581, China
tel: 86-769-83989660 fax: 86-769-83989662
e-mail: info@fujipoly.com.hk
ISO9001 ISO14001

Fuji Polymer Industries Co., Ltd.

Taipei Liaison Office

Room B, 7F., No. 59, Tiansiang Rd.
Jhongsan District
Taipei City 10452, Taiwan
tel: 886-2-2586-5771 fax: 886-2-2586-5745
e-mail: fujipolytw@fujipoly.com.tw

FUJIPOLY SILICONE ELECTRONIC PACKAGING COMPONENTS

A NETWORK of DEPENDABLE PRODUCTS to INCREASE YOUR PRODUCTS' DEPENDABILITY

A worldwide network to serve your electronic packaging needs. Fujipoly's multi-plant system was established for, and continues to grow toward, excellence in meeting customers' needs matched with excellence in product performance.

We manage a globally responsive, diverse group of facilities. Technologies have been both developed and acquired. Locations have been established based on a borderless business strategy to meet the growing trend of internationalization.

Manufacturing and distribution centers located in Europe, North America and Asia keep us close to our customers' needs while giving them convenient access to our increasing technologies.

Less than 5% of silicone potential has been researched to date and even more applications than we can now imagine are possible.

The inherent advantages of silicone already seem limitless. There are very few commercial or industrial products which do not contain some form of it as a molded, extruded or die-cut shape.

The composition of formulations is almost infinite, each offering strong advantages in one characteristic or another, many with great superiority over other materials.

Fujipoly's proprietary research and specific treatments are focused on obtaining the highest overall performances for the field of electronic packaging. Some of these areas are:

- Heat Resistance
- Flame Retardance
- Low Compression Set
- Oil & Solvent Resistance
- Weather Resistance
- Thermal Conductivity
- Electrical Conductivity
- Electrical Insulation
- Cold Resistance
- Self Adhesion
- Variety of Shapes and Sizes Possible
- Aging Resistance
- Ease of Custom Manufacturing



ZEBRA® Elastomeric Connectors


ZEBRA® Elastomeric Electronic Connectors are a comprehensive group of high performance interconnect devices with applications throughout the entire field of electronics.

With the expansion of micro-electronics and miniaturization of all products, the same high reliability must be maintained.

ZEBRA® Elastomeric Connectors are an obvious choice and one which offers a variety of alternatives based on the primary design objectives. Some of the more important considerations are:

- High Density, increased number of I/O's
- Low resistance, high current capacity
- Low insertion force, low compression force
- Redundant contact engagement
- High electrical and mechanical reliability
- Chemical stability, degradation resistance
- Cost-effectiveness, ease of assembly

ZEBRA® Elastomeric Connectors have alternating conductive and non-conductive layers. See diagram below. The conductive layers are oriented vertically in the thickness direction, making contact from top to bottom.

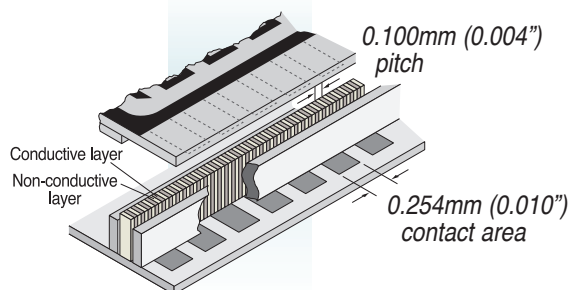

Typical ZEBRA® Connector interface between two contact areas; such as, PCB to LCD, or PCB to PCB.

All styles offer redundant contact depending on the pitch of the conductive layers, some as small as 0.05 mm centerline (see drawing above).


APPLICATIONS:

- LCD and EL displays
- Board-to-board
- Chip-to-board
- Memory cards
- Flex circuit-to-board
- Burn-in sockets
- Miniature and low profile interconnect - general electronics




High strength bonding unitizes layers into one rugged body.

Each of the styles is also available with outer support sections along the entire length on one or both sides (except Series 8000). The support is available in sponge or solid silicone rubber, and creates a larger width area. This eliminates the need for a holder while still allowing a very low compression force during deflection. For optional ordering information, see instructions on page 6 under "Self-Supported Connectors".

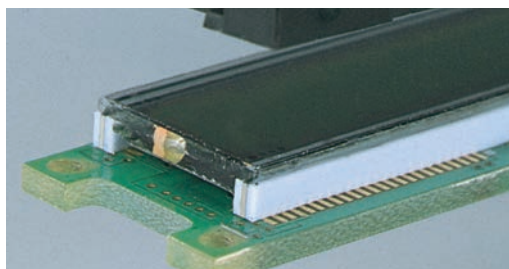

ZEBRA® Silver Connector in medical instrument display.

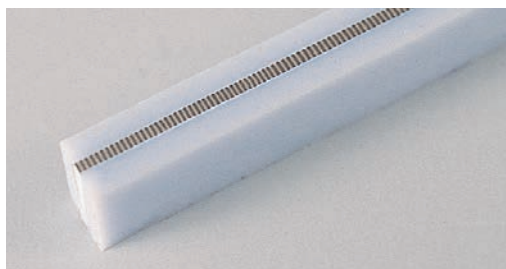


Typical ZEBRA® Connector with optional silicone rubber self-support sections on each side.

ZEBRA® CONNECTOR TECHNICAL DATA


The five ZEBRA® Elastomeric Connector designs below are detailed in their dimensional and performance characteristics. Follow the general guidelines to determine the design characteristics most suitable for your application. See following pages for detailed characteristics.

The photo enlargements at right demonstrate the multiple contact points per circuit conductor pad for typical ZEBRA® connector designs.

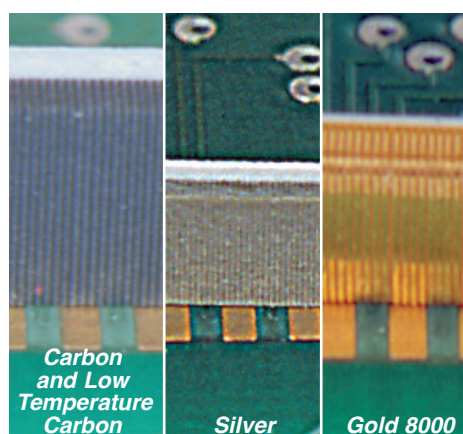


Name	Application Guidelines	Typical Products
Carbon	Economical general use with contact pitches at 140, 240 or 500 per inch	LCD's for aerospace, aircraft, military, meters, instruments, cameras
Low Temperature Carbon	Low temperature, outdoor applications, specifications as low as -60°C with contact pitches at 240 per inch	
Silver	300mA current carrying capacity, rugged long-life aging with contact pitches at 240 per inch	Electroluminescent displays, component-to-board, burn-in sockets, PCB to PCB, chip on glass, LCD's, chip on foil, COF's
Gold 8000	Zero insertion force, tight pitch, low compression force, very low resistance, very high current carrying capacity; contact pitches at 100, 133, 166 per inch	

TYPICAL PERFORMANCE CHARACTERISTICS:

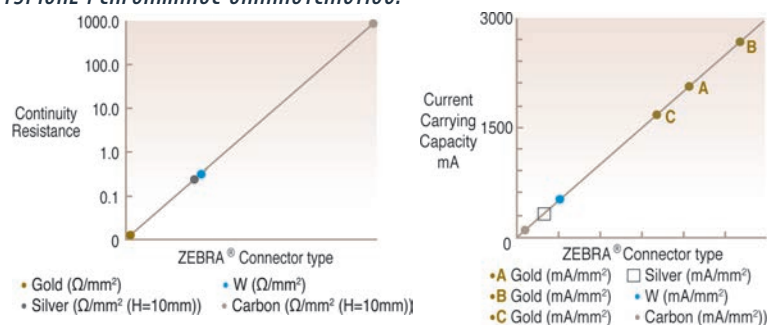

SIDE SUPPORT or INSULATION BARRIER:



Drawing at left shows side support or insulation on one or both sides, or one of each.


Various materials are available from the minimum insulating barrier of 0.05mm to support layers of up to 1.5mm. Support layers can be soft silicone rubber, or medium and soft silicone sponge. Recommended height is twice the width for minimum force deflection.

See page 6 for details. Consult customer service for ordering specifications.

Part Number Nomenclature:

To specify a connector to your exact requirements, substitute the metric measurements for width, length and height according to instructions below; example part# Ag(2.0 IB1 x 20 x 2.0)-U; **Note: For Carbon Zebra, make sure to advise pitch desired.**

ZEBRA® Ag (2.0 – IB1 x 20 x 2.0)

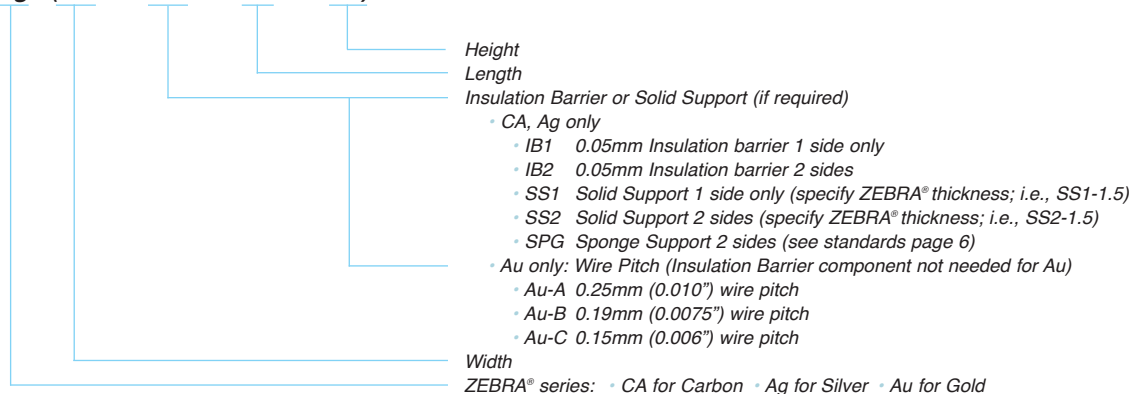

ZEBRA® Elastomeric Connectors

ZEBRA® CARBON and LOW TEMPERATURE CARBON CONNECTORS

FUJIPOLY ZEBRA® connectors (see figure 1) have alternating layers of conductive carbon-filled and non-conductive silicone rubber. They make reliable connections by being deflected between contacting surfaces. ZEBRA® connectors are used for connecting any LCD from small displays for watches to large area displays for instruments. Table A shows the different types of ZEBRA® connectors available. Table C shows performance characteristics.

Figure 1 shows the three dimensions of the ZEBRA® connector. When ordering, the three dimensions should be specified within the limits shown in table B.

For best overall performance, ZEBRA® connectors must be ordered and used with a ratio of H/W equal to or greater than 1.5.

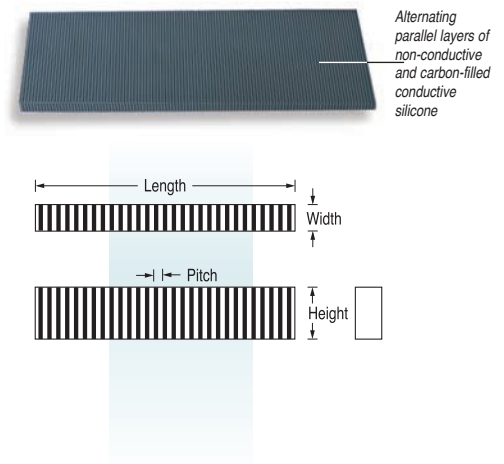


Figure 1

Series	LCD Contact Spacing Center-to-Center	Pitch: Sum of the Thickness of an Adjacent Conductive and Non-conductive Layer		Conductive Layers per inch	Individual Conductive and Insulating Layer Thickness		Available Lengths Maximum
	Minimum	Nominal	Maximum		Minimum	Maximum	
1002 (CZ410/CZ710)	0.015 in. 0.38 mm	0.004 in. 0.10 mm	0.006 in. 0.15 mm	240	0.001 in. 0.025 mm	0.004 in. 0.10 mm	9.0 in. 230 mm
2004 (CZ418)	0.020 in. 0.50 mm	0.007 in. 0.18mm	0.010 in. 0.25 mm	140	0.002 in. 0.050 mm	0.006 in. 0.15 mm	9.0 in. 230 mm
2005 (CZ405/CZ705)	0.010 in. 0.25 mm	0.002 in. 0.050 mm	0.004 in. 0.10 mm	500	0.0004 in. 0.010 mm	0.0024 in. 0.060 mm	9.0 in. 230 mm

TABLE A

Measurement

Tolerance (inches/mm)

Length=L	0.157 in. to 2.40 in. — ± 0.008 in. / 2.410 in. to 6.00 in. — ± 0.015 in. / 6.010 in. to 7.87 in. — ± 0.020 in. / 7.880 in. to 9.00 in. — ± 0.039 in. / 4.00 mm to 61.00 mm — ± 0.20 mm 61.2 mm to 152.4 mm — ± 0.38 mm 152.6 mm to 200.0 mm — ± 0.50 mm 200.1 mm to 230.0 mm — ± 1.00 mm
Height=H	0.020 in. to 0.750 in. ± 0.005 in. / above 0.750 in./19.0 mm consult factory 0.50 mm to 19mm ± 0.127 mm
Width=W	0.015 in. to 0.039 in. — ± 0.002 in. / 0.040 in. to 0.079 in. — ± 0.003 in. / 0.080 in. to 0.118 in. — ± 0.005 in. / above 0.118 in./3.00 mm consult factory. 0.38 mm to 1.0 mm — ± 0.050 mm 1.01 mm to 2.0 mm — ± 0.076 mm 2.01 mm to 3.0 mm — ± 0.127 mm

TABLE B

ZEBRA® Connectors	Temperature Range		Current Carrying Capacity 0.040" x 0.040" pad	Resistance Between Layers
	Minimum	Maximum		
Carbon	-40°F -40°C	212°F 100°C	0.005 amps	10 ¹² ohms

TABLE C

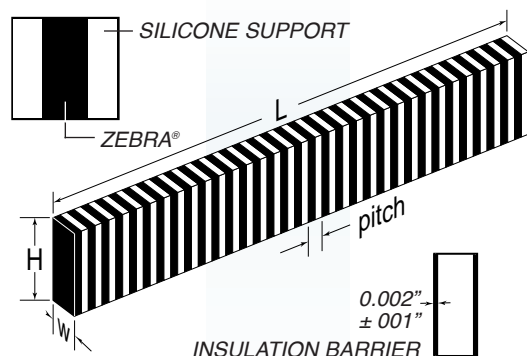


Figure 2 Recommended Height (H) should be 1.5 x Width (W) dimension for minimum force deflection. Maximum Skewness 2% of Height.

ZEBRA® CONNECTOR DIMENSIONS

Figure 2 shows the three dimensions of the ZEBRA® connector. When ordering, the three dimensions should be specified within the limits shown in Table B. For best overall performance, ZEBRA® connectors must be ordered and used with a ratio of H/W equal to or greater than 1.5. Details show silicone support (left) and insulation barrier (right). Each is available on one or both sides. Configurations may also include support on one side and insulation on the other.

ZEBRA® CONNECTOR INSULATING BARRIER

Description	Insulating Barrier
Color (one only)	White
Hardness, Durometer A	30
Dielectric Strength volts/mil.	500
Resistance, ohms	10^{12}
Insulating Barrier Width (B) in.*	0.002 ± 0.001
(B) mm	0.050 ± 0.025

TABLE D *The tolerance of W_1 is equal to the sum of the tolerances of W.

NOMINAL RESISTANCE CALCULATION

To calculate the resistance of the ZEBRA® connector use the following formulas:

Where: C_w = Contact pad width in inches
 H = ZEBRA® connector height in inches
 W = ZEBRA® connector width in inches

Metric:

$$R = \frac{60 \times H}{E_w \times W}$$

Inches:

$$R = \frac{2.37 \times H}{E_w \times W}$$

Where:

R = Resistance (Ω)
 E_w = Electrode Pad width (mm or inches)
 W = Connector width (mm or inches)
 H = Connector height (mm or inches)

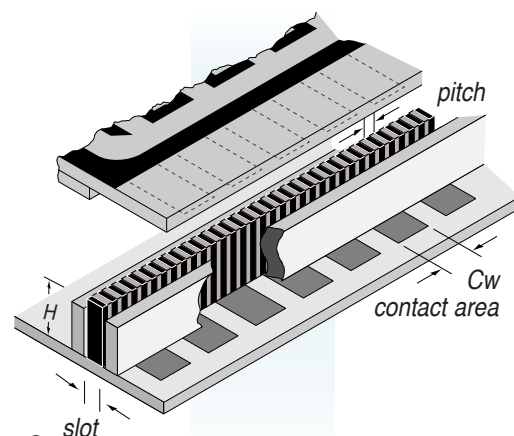


Figure 3

NOMINAL FORCE DEFLECTION - PLAIN ZEBRA® OR INSULATION BARRIER TYPE

ZEBRA® connectors should be deflected 5% to 25% of H. To calculate F-Force for deflection, use the following formula:

Where:

F = Force (N)

$$D = \frac{H - H_1}{H} \times 100 (\%)$$

H = Height of connector (mm or inches)

H_1 = Deflected height of connector (mm or inches)

W = Width of connector (mm or inches)

W_1 = Width of ZEBRA portion (mm or inches)

L = Length of connector (mm or inches)

Metric:

$$F(N) = 9 \times D \times W \times L \times 9.8 \times 10^3$$

Inches:

$$F(N) = 5806 \times D \times W \times L \times 9.8 \times 10^3$$

NOMINAL FORCE DEFLECTION - SILICONE SUPPORT TYPE

Metric:

$$F(N) = [(9 \times D \times W_1 \times L) + \{2.2 \times D \times (W - W_1) \times L\}] \times 9.8 \times 10^3$$


Inches:

$$F(N) = [(5806 \times D \times W_1 \times L) + \{1419 \times D \times (W - W_1) \times L\}] \times 9.8 \times 10^3$$

ZEBRA® Elastomeric Connectors

ZEBRA® SOLID SELF-SUPPORTED CONNECTORS

The Solid Self-Supporting ZEBRA® connector utilizes a standard ZEBRA® connector element supported by a soft, non-conductive silicone rubber on one or two sides. The silicone rubber creates a larger width that eliminates the need for a holder, and yet the force required for deflection is very low. The standard Solid Self-Supporting ZEBRA® connector has a 0.020"/0.50mm wide ZEBRA® connector element and is available in 8 different widths to accommodate LCD's with a glass lip overhang of 0.050"/1.27 mm minimum.

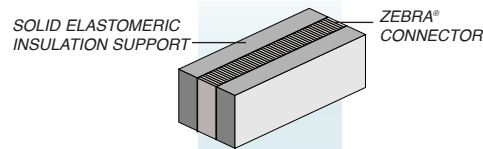

ZEBRA® Element	LCD Contact Spacing in/mm	Standard Connector Widths	
2004 (CZ418)	0.020/0.50	0.050 in./ 1.27 mm	0.090 in./ 2.3 mm
1002 (CZ410/CZ710)	0.010/0.25	0.060 in./ 1.50 mm	0.100 in./ 2.5 mm
2005 (CZ405/CZ705)	0.006/0.15	0.070 in./ 1.8 mm	0.120 in./ 3.00 mm
		0.080 in./ 2.0 mm	0.140 in./ 3.50 mm

Measurement


Tolerance (inches/mm)

Length=L	0.157 in. to 2.40 in. — ± 0.008 in.	4.00 mm to 61.00 mm — ± 0.20 mm
	2.410 in. to 6.00 in. — ± 0.015 in.	61.2 mm to 152.4 mm — ± 0.38 mm
	6.010 in. to 7.87 in. — ± 0.020 in.	152.6 mm to 200.0 mm — ± 0.50 mm
	7.880 in. to 9.00 in. — ± 0.039 in.	200.1 mm to 230.0 mm — ± 1.00 mm
Height=H	0.039 in. to 0.750 in. ± 0.005 in.	1.0 mm to 19mm ± 0.127 mm
	above 0.750 in/19.0 mm consult factory	
Width=W	0.050 in. to 0.079 in. — ±0.006 in.	1.27 mm to 2.00 mm — ± 0.15 mm
	0.080 in. to 0.100 in. — ±0.007 in.	2.03 mm to 2.54 mm — ± 0.18 mm
	0.101 in. to 0.140 in. — ±0.008 in.	2.55 mm to 3.50 mm — ± 0.20 mm
	above 0.140 in./3.50 mm and for custom widths consult factory.	

ZEBRA® Connectors	Temperature Range		Current Carrying Capacity	Resistance
	Minimum	Maximum	0.040" x 0.040" pad	Between Layers
All series	-40°F	212°F	0.005 amps	10 ¹² ohms
	-40°C	100°C		

ZEBRA® SPONGE SELF-SUPPORTED CONNECTORS

The Self Supporting Sponge ZEBRA® connector utilizes standard ZEBRA® connector elements supported by a silicone sponge rubber on one or two sides. The silicone sponge creates a larger width that can eliminate the need for a holder, and yet the force required for deflection is very low. The standard Self Supporting Sponge ZEBRA® connector is available in a host of widths to accommodate LCD's with a glass lip overhang of 0.060"/1.5 mm minimum. The Self Supporting Sponge ZEBRA® connector is used to connect LCD's to printed circuit boards and eliminates bowing of the printed circuit board due to the low force required to make contact.

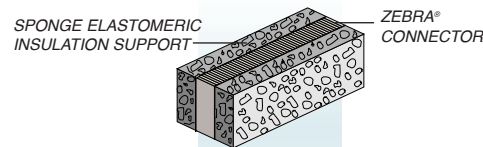

ZEBRA® Element	LCD Contact Spacing in/mm	Standard Connector Widths	
2004 (CZ418)	0.020/0.50	.060 in./ 1.5 mm .087 in./ 2.0 mm	.118 in./ 3.0 mm
1002 (CZ410)	0.010/0.25	.063 in./ 1.6 mm .091 in./ 2.3 mm	.126 in./ 3.2 mm
2005 (CZ405)	0.006/0.15	.067 in./ 1.7 mm .100 in./ 2.5 mm	.138 in./ 3.5 mm
		.070 in./ 1.8 mm .102 in./ 2.6 mm	.150 in./ 3.8 mm
		.075 in./ 1.9 mm .106 in./ 2.7 mm	.157 in./ 4.0 mm
		.079 in./ 2.0 mm .110 in./ 2.8 mm	

Measurement


Tolerance (inches/mm)

Length=L	0.157 in. to 2.40 in. — ± 0.008 in.	4.00 mm to 61.00 mm — ± 0.20 mm
	2.410 in. to 6.00 in. — ± 0.015 in.	61.2 mm to 152.4 mm — ± 0.38 mm
	6.010 in. to 7.87 in. — ± 0.020 in.	152.6 mm to 200.0 mm — ± 0.50 mm
Height=H	0.039 in. to 0.750 in. ± 0.005 in.	1.0 mm to 19mm ± 0.127 mm
	above 0.750 in/19.0 mm consult factory	
Width=W	0.060 in. to 0.157 in. — ±0.004 in.	1.52 mm to 4.0 mm — ± 0.1 mm
	above 0.157 in./4.00 mm consult factory.	

ZEBRA® Connectors	Temperature Range		Current Carrying Capacity	Resistance
	Minimum	Maximum	0.040" x 0.040" pad	Between Layers
All series	-55°F	260°F	0.005 amps	10 ¹² ohms
	-50°C	125°C		

ZEBRA® GOLD 8000 CONNECTORS

The FUJIPOLY ZEBRA® Series 8000 elastomeric connector elements are D-shaped, low durometer silicone elastomer cores around which flat metallic gold-plated conductors are vulcanized in a row parallel to each other. The tips of the metallic conductors are turned upward so that point contact can be effected; in addition, contact is made to the flat area when the connector element is positioned between two printed circuit boards. The point contact will penetrate surface oxides or contaminants which might be present on the surface of the contact pads, thus assuring reliable electrical connection on two planes. Also available are standard board-to-board assemblies which include connector and holder.

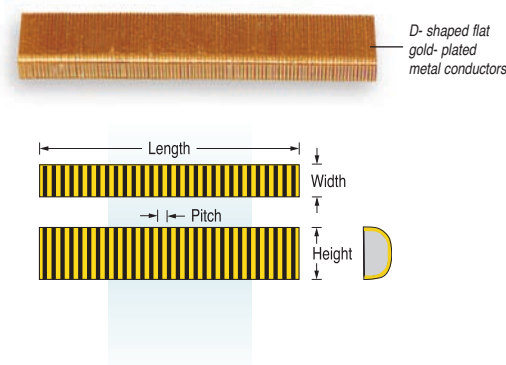

DIMENSIONAL SPECIFICATIONS

Connector Dimensions*	Minimum		Maximum	
Length=L	0.200" ± 0.005"	5.08mm ± 0.127mm	6.000" ± 0.030"	152.4mm ± 0.762mm
Height=H	0.100" ± 0.005"	2.54mm ± 0.127mm	0.500" ± 0.015"	12.70mm ± 0.381mm
Width=W	0.060" ± 0.005"	1.52mm ± 0.127mm	0.125" ± 0.010"	3.18mm ± 0.254mm

Note: For good design practice and low deflection force requirements, the height "H" should be twice the width "W". For other sizes consult factory.

MATERIALS

Connector Component	Materials Used
Conductive Elements	Gold-plated copper wire. gold 0.00025mm (0.00001"), nickel 0.0013mm (0.00005").
Wire Size and Spacing (Series 8000 A,B and C)	A. 0.05mm x 0.127mm (0.002" x 0.005") flat wire on 0.25mm (0.010") center-to-center spacing. (Min. 100 wires/ inch.) B. 0.05mm x 0.10mm (0.002" x 0.004") flat wire on 0.19mm (0.0075") center-to-center spacing. (Min. 133 wires/inch.) C. 0.025mm x 0.076mm (0.001" x 0.003") flat wire on 0.15mm (0.006") center-to-center spacing. (Min. 166 wires/inch.)
Connector body	Non-conductive tan color silicone rubber. UL-94-HB rating, 500 volts/mil dielectric strength.
Film	0.025mm (0.001") thick polyamide dielectric strength of film ASTM-D-149, 2000 volts/mil.

PERFORMANCE CHARACTERISTICS

Parameter	Conditions and Performance
Contact Resistance	Less than 25 milliohms on 0.025" wide contact pads; 0.100 amperes DC, Kelvin- type four probe test method
Insulation Resistance	Minimum 10 ¹² ohms between adjacent conductive elements.
Current Carrying Capacity	Series 8000 A and B, 500 mA per wire max.; Series 8000 C, 250 mA per wire max.
Capacitance	Maximum 0.100 picofarads per adjacent pad at 1 MHz and 0.100" high ("H").
Inductance	Maximum 7 nanohenries per adjacent pad at 1 MHz and 0.100" high ("H").
Repeated Actuations	500 actuations without appreciable change in contact resistance (deflection of 15%).
Deflection	8% to 20%. Recommended deflection 10 to 15% of original height.
Deflection Force/Inch	4lbs. per linear inch for 15% deflection for a 0.062" ("W") x 0.285 ("H") connector.
Operating Temperature Range	-20° C min., 125° C max.
Salt Spray Test	MIL-STD-202E, method 101D, condition B. 5% salt solution 95° F, 48 hours. There was no evidence of blistering or peeling of the contact material.
Temperature Cycling	MIL-STD-202E, method 102A, condition D, -55° C, 25° C, 125° C. There was no change in the physical properties of the specimens.
Humidity (Steady State)	MIL-STD-202E, method 103B, condition C modified. 95% RH room temperature. There was no appreciable change in contact resistance after 500 hours exposure.
Corrosive Environment	1,000 hours exposure at 1 ppm H ₂ S and 1 ppm O ₂ , 60° C AND 75% RH. Slight change in contact resistance; no evidence of contact peeling or blistering.


Elastomeric Connectors

ZEBRA® HIGH PERFORMANCE SILVER CONNECTORS

FUJIPOLY low resistance ZEBRA® elastomeric connectors are constructed of alternating parallel layers of electrically conductive and non-conductive silicone elastomer. The electrically conductive layer is filled with silver-metal particles.

The composite alternating layers provide reliable electrical connection when placed between two aligned conducting surfaces.

The low resistance ZEBRA® provides a redundant connection with a minimum of two conductive layers recommended per PC contact pad. The connector is available with insulating barrier or silicone supports (See page 6). The connectors are used for connecting electroluminescent (EL) and plasma type displays to PC boards or for connecting hybrid circuits to PC boards, among other applications.

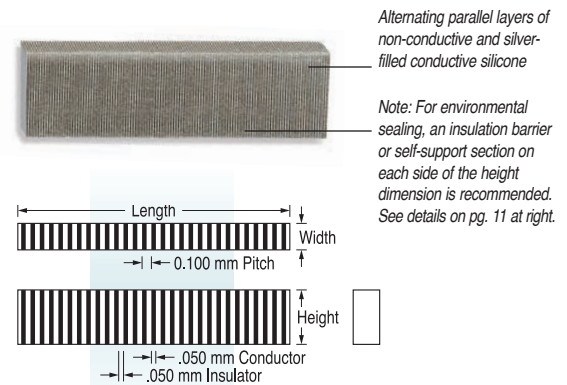

Low resistance ZEBRA® connectors are positioned between two aligned surfaces and are mechanically clamped together with a lid or another PC board. The connectors may be free standing or positioned in a retainer depending on packaging profiles and design.

Series	Contact Spacing Center-to-Center Minimum	Pitch: Sum of the Thickness of an Adjacent Conductive and Non-conductive Layer		Conductive Layers per inch Minimum	Individual Conductive and Insulating Layer Thickness		Available Lengths
		Nominal	Maximum		Minimum	Maximum	
5002 (SZ100)	0.015 in. 0.38 mm	0.004 in. 0.100 mm	0.006 in. 0.152 mm	240	0.001 in. 0.025 mm	0.003 in. 0.075 mm	5.00 in. 127 mm

TABLE A (For requirements over 4" consult factory)


Measurement	Tolerance (inches/mm)
Length=L	0.250 ± 0.005 in. to 5.000 ± 0.025 in./..... 6.35 ± 0.12mm to 127.00 ± 0.64mm
Height=H	0.040 ± 0.003 in. to 0.500 ± 0.007 in./..... 1.00 ± 0.08mm to 12.70 ± 0.18mm
Width=W	0.020 ± 0.003 in. to 0.100 ± 0.005 in./..... 0.50 ± 0.08mm to 2.54 ± 0.13mm

TABLE B

ZEBRA® Connectors	Temperature Range Minimum Maximum		Current Carrying Capacity 0.040" x 0.040" pad	Resistance Between Layers
Silver ZEBRA®	-40°F -40°C	185°F 85°C	0.3 amps	10 ¹² ohms

TABLE C

SELF-SUPPORT AND INSULATION BARRIER

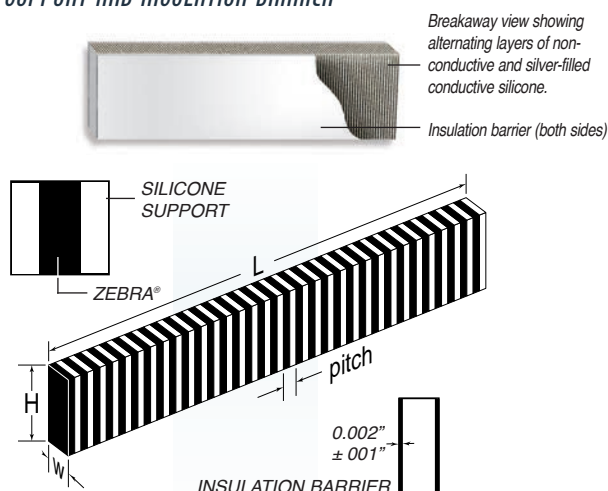

Details show silicone support (left) and insulation barrier (right). Each is available on one or both sides. Configurations may also include support on one side and insulation on the other.

Note: Recommended Height (H) should be twice Width (W) dimension for minimum force deflection. Maximum Skewness 2% of Height.

DESIGN RECOMMENDATIONS

Recommended deflection range is 5-25% of free height. Minimum deflection will vary with packaging applications and should consider overall height, PC board warpage, finish, etc. (Contact Fujipoly Product Application Engineering for assistance.) Design recommendations for solid ZEBRA® over 0.400" deflect 0.050" maximum. Silicone supported over 0.400" deflect 0.060" typical.

TEST CONDITIONS:

The use of an insulating barrier or silicone self-support material on one or both sides of the connector is recommended. The silicone support is utilized to reduce clamp force and provide an element of environmental protection for a cost-effective connection.

Item	Standard	Test Method
High Temperature	MIL-202D-108A	85° C 1500 hr
Low Temperature	—	-40° C 500 hr
Moisture	MIL-202D-103B	40° C 95% RH x 500 hr (250mA/pad)
Thermal cycle	MIL-202E-107G	65°C/25°C/150°C/ 25°C, 5 cycles

NOMINAL RESISTANCE CALCULATION

For the purpose of calculating the resistance of silver ZEBRA® connectors and testing them for compliance please use the following formula:

Where: R = Resistance in Ohms
 W_1 = Width of ZEBRA® portion (inches or mm)
 E_W = Electrode pad width (inches or mm)
 H = ZEBRA® height (inches or mm)

Metric (mm) English (inches)

$$R = \frac{H \times 0.01}{E_W \times W_1} + 0.10 \quad R = \frac{H \times 0.0004}{E_W \times W_1} + 0.10$$

Example: if ZEBRA® is 0.100"/2.54 mm H and 0.030"/0.762mm W_1 , then the maximum resistance on a 0.050"/1.27 mm wide pad will be:

Metric

$$R = \frac{2.54 \times 0.01}{0.762 \times 1.27} + 0.10 = 0.127 \text{ ohms}$$

English:

$$R = \frac{0.100 \times 0.0004}{0.030 \times 0.050} + 0.10 = 0.127 \text{ ohms}$$

NOMINAL FORCE DEFLECTION - PLAIN ZEBRA® OR INSULATION BARRIER TYPE

ZEBRA® connectors should be deflected 5% to 25% of H. To calculate F-Force for deflection, use the following formula:

Where:

F = Force (N)

$$D = \frac{H - H_1}{H} \times 100 (\%)$$

H = Height of connector (mm or inches)

H_1 = Deflected height of connector (mm or inches)

W = Width of connector (mm or inches)

W_1 = Width of ZEBRA portion (mm or inches)

L = Length of connector (mm or inches)

Metric:

$$F(N) = 10.0 \times D \times W \times L \times 9.8 \times 10^{-3}$$

Inches:

$$F(N) = 6452 \times D \times W \times L \times 9.8 \times 10^{-3}$$

NOMINAL FORCE DEFLECTION - SILICONE SUPPORT TYPE

Metric:

$$F(N) = [(10.0 \times D \times W_1 \times L) + \{2.2 \times D \times (W - W_1) \times L\}] \times 9.8 \times 10^{-3}$$

Inches:

$$F(N) = [(6452 \times D \times W_1 \times L) + \{1149 \times D \times (W - W_1) \times L\}] \times 9.8 \times 10^{-3}$$

ZEBRA® Dummy Elastomeric Connectors

Non-conductive silicone strips made in the same exacting tolerances as the conductive ZEBRA® connectors.

Used in locations adjacent to the active connector to balance the overall leveling and positioning of the display; also to control shock and vibration, and for use as an environmental seal between bezels and LC displays.


Can be installed in the same plane as the connector, and also between the bezel and the display in a variety of easy installation methods.

Consistent dimensional tolerance control assures accurate electronic packaging.

APPLICATIONS:

- LCD and EL display balancing
- Bezel gasket, environmental seal
- Shock, vibration damping

Two types are available which match the mechanical functions of the active ZEBRA® connectors: extruded and closed cell sponge. A range of compression characteristics are available based on the material durometer selections shown below.

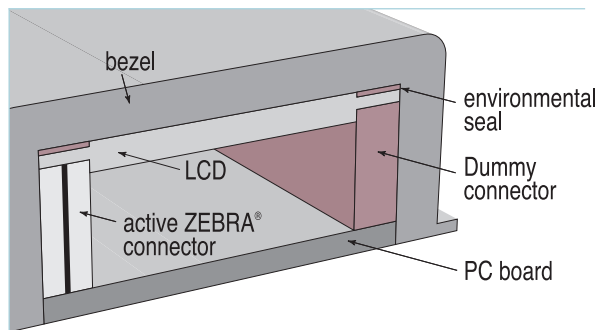

Typical Dummy ZEBRA® installation as an environmental seal and as Dummy connector.

Type	Application Guidelines	Dimensions (mm)
Extruded	19 Durometer - translucent	maximum: Length 457.0 Width 152.0 Thickness 0.38min., then in increments of 0.127 up to 1.78
	25 Durometer - pink, blue	
Sponge	20 Durometer - pink	maximum: Thickness 0.38min., then in increments of 0.127 up to 1.78

Custom configurations are also available. For further information, contact Customer Service.

Part Number Nomenclature:

To specify a Dummy connector to your exact requirements, substitute the metric measurements for width, length and height according to the instructions below.

ZEBRA® DC 1.5 x 20 x 1.78 - EXT - 19



Durometer • 10, 19, 20, 25
EXT for extruded • SPG for closed cell sponge
Width
Length
Thickness
ZEBRA® series • DC for Dummy connector

ZEBRA® Series Elastomeric Matrix Connectors

Excellent for **Land Grid Arrays** and similar type interconnects. Extremely accurate silicone rubber electronic connectors with anisotropic conductive properties. A range of 300 to 2,000 fine metal wires per 1 cm² are embedded in the thickness direction of the transparent silicone rubber sheet. The fine metal conductors are gold-plated to ensure low resistance and the ability to withstand a relatively high current flow.

High density and greatly increased number of I/O's are possible; especially beyond 200 connections. Eliminates the costs of soldering and related rework. Facilitates denser and less expensive packaging.

After inserting the correctly sized connector pad between the opposing groups of electrodes, all that is necessary is to apply the appropriate pressure to allow the electrodes to be properly connected.




APPLICATIONS:

- Ball Grid Arrays
- Tape Carrier Packs
- Quad Flat Packs
- Integrated Circuits
- Leadless Chip Carriers
- Printed Circuit Board

35X magnification side view exhibits compression of fine metal conductors

FUNCTION:

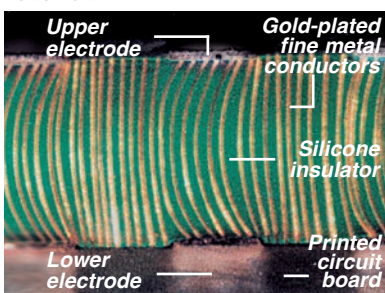

TYPICAL CHARACTERISTICS:

Measure	Unit	Thickness		Remarks
		0.5	1.0	
Continuity Resistance	Ω -mm ²	0.25	0.45	± 30%
Current Density	mA/mm ²	500		N/A
Resistance Between Adjacent Conductors	Ω	10 ¹⁰ or more		C pattern p = 0.35
Light Transmission	%	90		1.0 mm thick L pattern p = 1.0
Operating Temperature	°C	-20 to +100		N/A

W Series	Pitch (P)	Pattern Side View	Pattern Plan View	Thicknesses	Applied Electrode Gaps	Suitable Electrodes Width - Length	Maximum Dimensions Length Width	Applications
WSL	1.0			0.50mm	over 0.4	over 0.3 over 1.5	76.0mm 5.0mm	Combination type
				1.00mm	over 0.5	over 0.5 over 1.5		
WSC	0.35			0.50mm	* (over 0.6) over 0.6	(over 0.7) over 0.9 (over 0.9) over 0.9	50.0mm 50.0mm	Matrix type electrode
				1.00mm	(over 0.7) over 0.7	(over 0.7) over 0.9 (over 0.9) over 0.9		
WBC	0.35			0.50mm	(over 0.6) over 0.6	(over 0.7) over 0.9 (over 0.9) over 0.9	50.0mm 50.0mm	Matrix type electrode
				1.00mm	(over 0.7) over 0.7	(over 0.7) over 0.9 (over 0.9) over 0.9		

Notes: (1) The **WSL** and **WSC** types have straight metal conductors protruding slightly from both top and bottom of the silicone rubber sheet to ensure perfect connections with slight pressure. Designed for mounting applications.

(2) The **WBC** type has curved fine metal conductors embedded in a silicone rubber sheet which are flush with the top and bottom planes. The curved configuration facilitates repeated compressions. Ideal for inspection applications.

* The upper: 12.5mm x 12.5mm product

The lower: 25mm x 25mm, 37.5mm x 37.5mm or 50mm x 50mm product

Part Number Nomenclature:

WSL-102-2.0 x 20.0 x 0.5

Thickness (mm)
Length (mm)
Width (mm)
Number of conductors
(rows are numbered 1 through 5)
Pitch
Conductor Pattern • L
Type • WS: Fine metal wire straight

WSC-035-5.0 x 20.0 x 0.5

Thickness (mm)
Length (mm)
Width (mm)
Pitch • 035 = 0.35
Conductor Pattern • C pattern
Type • WS: Fine metal wire straight
• WB: Fine metal wire curved

More power and light weight. In the past, these two characteristics in electronics were mutually exclusive. Now, micro-electronics are just that, and in addition, need thermal management components to further complement these objectives.

SARCON® is an advanced silicone rubber with high thermal conductivity and superior flame-retardancy. By combining the inherent silicone rubber properties of heat resistance, electrical insulation and long-term aging into one compound, this universally applicable material can be made in an unlimited number of thermal management configurations.

UL FILE NUMBER: E58126

APPLICATIONS:

- Thermal conductive insulators for semiconductors
- Compression jointing materials for thermistors and temperature sensors
- Thermal conductive material for all types of heaters

FORMULATIONS/CONFIGURATIONS: A variety of specific compounds are available for a wide range of performance requirements in Sheets, Rolls, Die-cuts, Sleeves, Gel, Extrusions, Moldings

THERMAL CONDUCTIVITY CONVERSION TABLE

Thermal Conductivity	BTU-in/hrft ² F	Cal/cm - sec - °C	Watt/m·K
BTU-in / hrft ² F	1	3.4x10 ⁻⁴	0.14
Cal / cm - sec - °C	2.9x10 ³	1	4.2x10 ²
Watt / m·K	6.9	2.4x10 ⁻³	1

SARCON®	Type	Application Guidelines	Typical Thermal Conductivity		Pg.#
			Cal/cm - sec - °C	Watt/m·K	
SARCON® GHR	Thin Film	High thermal conductivity with 0.05mm glass cloth reinforcement	3.4 x 10 ⁻³	1.40	13
SARCON® GSR		Highest thermal conductivity with 0.05mm glass cloth reinforcement	7.0 x 10 ⁻³	2.90	13
SARCON® GTR		General purpose with 0.05 mm glass cloth reinforcement	2.2 x 10 ⁻³	0.90	13
SARCON® HR		High thermal conductivity	4.1 x 10 ⁻³	1.70	13
SARCON® QR		Low hardness with high thermal conductivity	2.6 x 10 ⁻³	1.10	13
SARCON® TR		General purpose for moldings and extrusions	2.9 x 10 ⁻³	1.20	13
SARCON® YR-a		Very high thermal conductivity	5.3 x 10 ⁻³	2.20	13
SARCON® GR-d	Standard Gap Filler	General purpose gap filler pad, UL94 V-0/V-1 class	3.6 x 10 ⁻³	1.50	18
SARCON® GR25A		General purpose gap filler pad, UL94 V-0/V-1 class	6.0 x 10 ⁻³	2.80	22
SARCON® GR-ae		General purpose gap filler pad, UL94 V-0/V-1 class	3.1 x 10 ⁻³	1.30	18
SARCON® GR-Sd	Low Compression Force Gap Filler	Low modulus gap filler material	3.4 x 10 ⁻³	1.50	26
SARCON® GR-SL		Lowest modulus gap filler material	6.5 x 10 ⁻³	2.70	26
SARCON® GR45A	High Performance Gap Filler	Medium thermal conductivity gap filler pad	14.4 x 10 ⁻³	6.00	22
SARCON® XR-e		Very thermal heat conductivity gap filler pad	26.3 x 10 ⁻³	11.00	18
SARCON® XR-j		Highest performance heat conductivity gap filler pad	33.4 x 10 ⁻³	14.00	20
SARCON® XR-m		New low thermal resistance gap filler pad	40.8 x 10 ⁻³	17.00	20
SARCON® SPG-15A	"Form in Place"	High viscosity type silicone compound gap filler	3.6 x 10 ⁻³	1.50	28
SARCON® SPG-30A		High viscosity type silicone compound gap filler	7.7 x 10 ⁻³	3.20	29
SARCON® SPG-20A		High viscosity type silicone compound gap filler	3.6 x 10 ⁻³	2.0	30
SARCON® SPG-50A		High viscosity type silicone compound gap filler	12 x 10 ⁻³	5.0	31
SARCON® GR-Pm	Putty	High thermal conductivity gap filler pad	14.4 x 10 ⁻³	6.00	24
SARCON® XR-Pe		High performance thermal conductivity gap filler pad	26.3 x 10 ⁻³	11.00	24
SARCON® XR-Um		Highest thermal conductive putty type silicone sheet	40.8 x 10 ⁻³	17.00	25
SARCON® XR-Um-AL		Highest thermal conductive putty type silicone sheet with Aluminum film	40.8 x 10 ⁻³	17.00	25
SARCON® XR-v		Highest thermal conductive thin film putty thermal interface	14.4 x 10 ⁻³	6	25
SARCON® XR-v-AL		Highest thermal conductive thin film putty thermal interface with aluminum barrier	14.4 x 10 ⁻³	6	25
SARCON® NR-c	Non-Silicone	Highly conformable non-flammable non-silicone gap filler	3.6 x 10 ⁻³	1.50	32
Mica		Shown for comparison purposes only	1.4 x 10 ⁻³	0.59	
Polyester		Shown for comparison purposes only	0.34 x 10 ⁻³	0.14	

SARCON® TECHNICAL INFORMATION



TYPICAL MATERIAL PROPERTIES

Test Properties		SARCON® TR			SARCON® HR			SARCON® YR-a		SARCON® QR		
Physical properties	Color	Greenish Gray			Brown			Dark Gray		Black		
	Hardness (ASTM D2240, type A)	75			85			81		55		
	Tensile strength (MPa)	5.4			4.9			3.2		2.3		
	Elongation (%)	100			60			85		250		
	Tear Strength (kN/m) (Angle Non-slit)	9			7			7.5 (Angle)		13		
Heat aging (Aging test by heating in air, to 200° C)		3 days	10 days	20 days	3 days	10 days	20 days	5 days	20 days	3 days	10 days	20 days
	Change in hardness (Point)	±0	+5	+9	+1	+1	+3	+9	+12	±0	+1	+5
	Change in tensile strength (%)	±0	±0	+6	-12	-12	-12	+31	+31	±0	+14	+24
Electrical properties	Change in elongation (%)	-16	-26	-34	-18	-24	-35	-41	-41	-7	-15	-27
	Volume resistivity (MΩ-m)	1 x 10 ⁷			1 x 10 ⁷			1 x 10 ⁶		1 x 10 ⁶		
	Breakdown voltage (kV/mm)	20			19			15		22		
	Dielectric constant	50Hz	10 ³ Hz	10 ⁶ Hz	50Hz	10 ³ Hz	10 ⁶ Hz	50Hz	10 ³ Hz	10 ⁶ Hz	50Hz	10 ³ Hz
	Dielectric dissipation factor	4.9	4.9	4.9	5.7	5.4	4.9	6.7	6.4	6.1	4.7	4.6
Thermal properties	Thermal conductivity (W/m-K)	0.002			0.002			0.03		0.003		
	Flame retardant (UL94)	0.001			0.002			0.02		0.002		
		1.2			1.7			2.2		1.1		
		V-0			V-0			V-0		V-0		

TYPICAL PRODUCT PROPERTIES

Properties	Unit	SARCON® TR			SARCON® HR			SARCON® YR-a			SARCON® QR		
		30T	45T	85T	30H	45H	85H	30Y-a	45Y-a	85Y-a	30Q	45Q	85Q
Color	visual	Greenish Gray			Brown			Dark Gray			Black		
Thickness	mm	0.30 ^{+0.1/-0}	0.45 ^{+0.05}	0.85 ^{+0.05}	0.30 ^{+0.1/-0}	0.45 ^{+0.05}	0.85 ^{+0.05}	0.30 ^{+0.1/-0}	0.45 ^{+0.05}	0.85 ^{+0.05}	0.30 ^{+0.1/-0}	0.45 ^{+0.05}	0.85 ^{+0.05}
Material	Binder	Silicone			Silicone			Silicone			Silicone		
	Filler	Alumina			Alumina+ALN						Alumina		
	Reinforcement	n/a			n/a			n/a			n/a		
Thermal Resistance	°C·in ² /W	0.62	0.73	1.35	0.42	0.52	0.76	0.28	0.30	0.50	0.57	0.77	1.25
Thermal Resistance w/PSA*	°C·in ² /W	n/a			n/a			n/a			n/a		
Specific Gravity	g/cm ³	2.3			2.4						2.2		
Hardness (ASTM D2240)	type A	75			85			86	89	87	55		
Tensile Strength	kN/m	1.7	2.3	4.3	1.7	2.3	4.2	1.6	2.1	3.5	0.8	1.0	2.0
Elongation	%	100			60			73	80	80	250		
Tear Strength	N	3	4	8	2	3	6	7.5			5	6	11
Volume Resistivity	MΩ-m	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁹	7x10 ⁶	6x10 ⁶	1x10 ⁶	1x10 ⁶	1x10 ⁶
Withstand Voltage	kV/minute	7	8	10	6	7	10	7	8	10	7	8	11
Dielectric Constant	50Hz 10 ³ Hz 10 ⁶ Hz	4.4	4.5	4.9	4.9	4.5	5.7	5.8	5.9	5.7	4.1	4.2	4.9
Maximum Use Temperature	°C	-60°C to +180°C			-60°C to +180°C			-60°C to +180°C			-60°C to +180°C		
Adhesive Coating	-	n/a			n/a			n/a			n/a		

* FTM P-3010 (ASTM D5470 Equivalent)

Properties	Unit	SARCON® GTR			SARCON® GHR			SARCON® GSR			
		15GTR	20GTR	30GTR	15GHR	20GHR	30GHR	20GSR	30GSR	45GSR	85GSR
Color	visual	Greenish Gray			Brown			White			
Thickness	mm	0.15 ^{+0.02/-0.04}	0.20 ^{+0.02/-0.04}	0.30 ^{+0.10/-0}	0.15 ^{+0.02/-0.04}	0.20 ^{+0.02/-0.04}	0.30 ^{+0.10/-0}	0.20 ^{+0.02/-0.04}	0.30 ^{+0.10/-0}	0.45 ^{+0.05}	0.85 ^{+0.05}
Material	Binder	Silicone			Silicone			Silicone			
	Filler	Alumina			Alumina+ALN			Boron Nitride			
	Reinforcement	Fiberglass			Fiberglass			Fiberglass			
Thermal Resistance	°C·in ² /W	0.51	0.56	0.66	0.55	0.57	0.61	0.30	0.34	0.39	0.51
Thermal Resistance w/PSA*	°C·in ² /W	0.78	0.83	0.93	0.63	0.66	0.72	0.64	0.66	0.71	0.83
Specific Gravity	-	2.2			2.4			1.7			
Hardness (ASTM D2240)	type A	87	87	92	92	92	95	90	90	90	88
Tensile Strength	kN/m	11			8			14	15	18	15
Elongation	%	2 or less			2 or less			3 or less			
Volume Resistivity	MΩ-m	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1x10 ⁷	1.0x10 ⁷
Withstand Voltage	kV/minute	4	6	7	2	4	8	3	5	7	10
Dielectric Constant	1KHz	2.5	3.2	3.5	3.0	3.3	3.9	2.6	3.0	3.2	3.7
Maximum Use Temperature	°C	-60°C to +180°C			-60°C to +180°C			-60°C to +180°C			
Adhesive Coating	-	Available			Available			Available			

* FTM P-3010 (ASTM D5470 Equivalent)


All dimensions in millimeters

SARCON® Type 1 Gap Filler Pads


SARCON® Type 1 Gap Filler Pads are highly conformable and high heat conducting gel materials in a versatile sheet form. They easily fit and adhere to most all shapes and sizes of components, including protrusions and recessed areas.

In areas where space between surfaces is uneven or varies and where surface textures are a concern regarding efficient thermal transfer, the supply consistency of the pads is excellent for filling air gaps and uneven surfaces.

Four series, each with a different construction, accommodate most every demanding application.

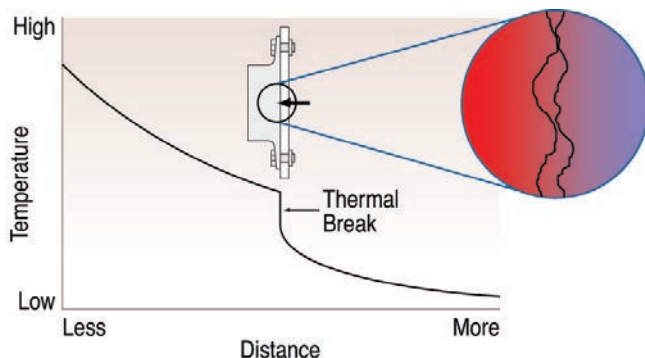

Thermal impedance of semiconductor mounted to substrate is appreciably increased at junction of porous surfaces.

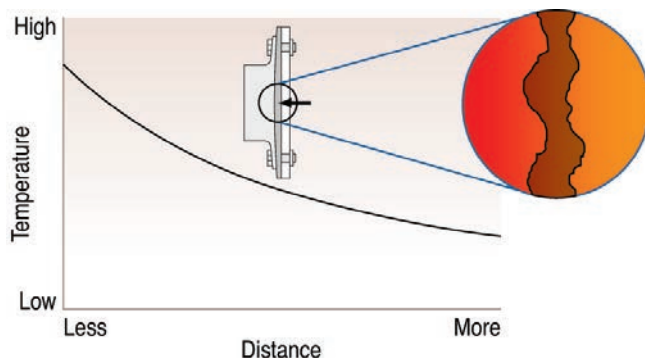

Thermal impedance of semiconductor mounted to substrate with Type 1 Gap Filler Pad is eliminated yielding higher temperature gradient.

SARCON®
Type 1
Gap Filler Pads

As shown above, even the most highly polished mating surfaces do not make reliable contact surfaces. Complete physical contact is necessary to minimize the resistance to heat flow for the best thermally conductive path. All such surface voids, when properly filled with a conformable, thermally conductive Type 1 GR series gap filler pad, will in most cases exhibit the continuous characteristics of a solid metal of the same dimensions.

The Type 1 GR Gap Filler Pad series can be further enhanced for special handling and die-cutting requirements as described in the chart below.

Gap filler materials are supplied in a fully cured state and remain pliable, easily conforming to minute surface irregularities.


UL FILE NUMBER: E58126





PART NUMBER NOMENCLATURE:

Standard: To specify a part number to your exact specifications, substitute the metric measurements for thickness, width and length according to the instructions below; example part# 50 GR-Hd - 100.0 x 100.0

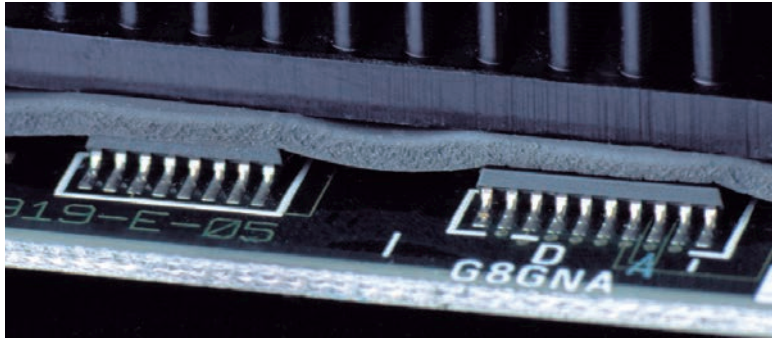50 GR-Hd - 100.0 x 100.0

Length (mm)	• Pre-cut 300 max.				
Width (mm)	• Pre-cut 200 max.				
SARCON® Type 1 Gap series:					
Thickness (mm)	• 30 = 0.3mm	• 100 = 1.0mm	• 200 = 2.0mm	• 300 = 3.0mm	• 400 = 4.0mm
	• 50 = 0.5mm	• 150 = 1.5mm	• 250 = 2.5mm	• 350 = 3.5mm	• 500 = 5.0mm




Type 1 Construction	Construction Description	"GR-ae"	"GR-d"	XR-e	"XR-j"	"XR-m"
GR and XR Series  GR Material	General purpose silicone compound	GR-ae (G-ae) UL94 V-0 Applications:	GR-d (G-d) UL94 V-0 Applications:	XR-e (X-e) UL94 V-0 Applications:	XR-j (X-j) UL94 V-0 Applications:	XR-m (X-m) UL94 V-0 Applications:
GR-H and XR-H Series  Hardened Surface GR Material	Same general purpose silicone compound as above plus additional hardening of the top surface to facilitate handling and installation during complex assemblies.	GR-Hae (G-Hae)	GR-Hd (G-Hd)	XR-He (G-He)	XR-Hj (G-Hj)	N/A
GR-F2 Series only  Nylon Mesh GR Material	Same general purpose silicone compound as above plus mesh reinforcement stiffener to prevent stretching; i.e., elongation of die-cut holes.	GR-F2ae (G-F2ae)	GR-F2d (G-F2d)	N/A	N/A	N/A
GR-HF2 Series only  Hardened Surface Nylon Mesh GR Material	Same general purpose silicone compound as above plus additional hardening of the top surface to facilitate handling and installation during complex assemblies, and mesh reinforcement stiffener to prevent stretching; i.e., elongation of die-cut holes.	GR-HF2ae (G-HF2ae)	GR-HF2d (G-HF2d)	N/A	N/A	N/A

SARCON[®] Type 2 Gap Filler Pads


SARCON[®] Type 2 Gap Filler Pads are highly conformable and high heat conducting gel materials in a versatile sheet form. They easily fit and adhere to most all shapes and sizes of components, including protrusions and recessed areas.

In areas where space between surfaces is uneven or varies and where surface textures are a concern regarding efficient thermal transfer, the supply consistency of the pads is excellent for filling air gaps and uneven surfaces.

Four series, each with a different construction, accommodate most every demanding application.

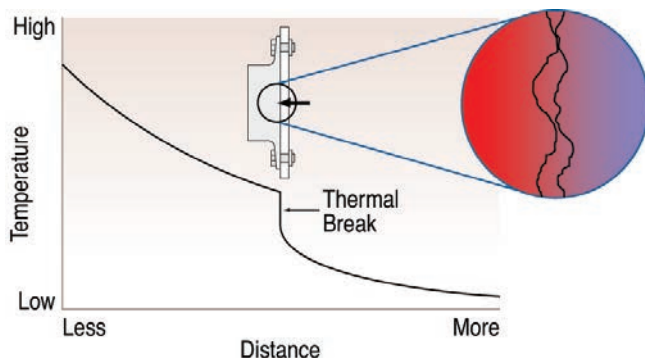

Thermal impedance of semiconductor mounted to substrate is appreciably increased at junction of porous surfaces.

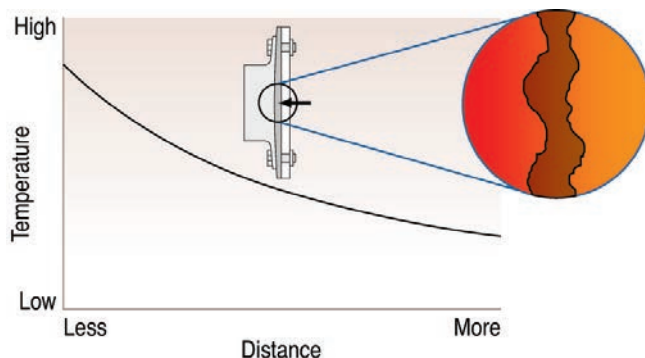

Thermal impedance of semiconductor mounted to substrate with Type 2 Gap Filler Pad is eliminated yielding higher temperature gradient.

SARCON[®]
Type 2
Gap Filler Pads

As shown above, even the most highly polished mating surfaces do not make reliable contact surfaces. Complete physical contact is necessary to minimize the resistance to heat flow for the best thermally conductive path. All such surface voids, when properly filled with a conformable, thermally conductive Type 2 GR series gap filler pad, will in most cases exhibit the continuous characteristics of a solid metal of the same dimensions.

The Type 2 GR Gap Filler Pad series can be further enhanced for special handling and die-cutting requirements as described in the chart below.

Gap filler materials are supplied in a fully cured state and remain pliable, easily conforming to minute surface irregularities.


UL FILE NUMBER: E58126

PART NUMBER NOMENCLATURE:

Standard: To specify a part number to your exact specifications, substitute the metric measurements for thickness, width and length according to the instructions below; example part# GR25A-OO-0.3-GY



GR25A - OO - 100 GY

	- Width(mm) x Length(mm)
Color	• GY = Gray
Thickness	• 30 = 0.3mm, 50 = 0.5mm, 100 = 1.0mm, 150 = 1.5mm, 200 = 2.0mm, 250 = 2.5mm, 300 = 3.0mm, 350 = 3.5mm, 400 = 4.0mm, 450 = 4.5mm, 500 = 5.0mm
Construction	• OO = Plain Type, OH = Hardened one Surface, FO = with Nylon Mesh FH = Hardened one Surface with Nylon Mesh
Series	• GR25A

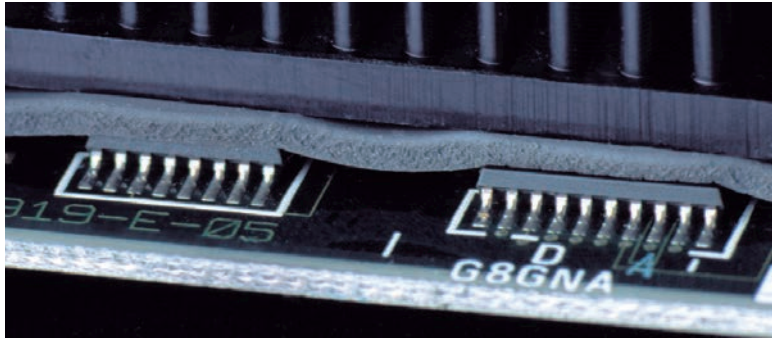

Type 2 Construction	Construction Description	GR25A	GR45A
<p>OO</p> <p>GR Material</p>	General purpose silicone compound	<p>GR25A-OO</p> <p>Applications:</p> <ul style="list-style-type: none"> • Between chassis wall and other surface • Between semi conductor and heat sink • Large area heat transfer to heat sink • Between CPU and heat sink 	<p>GR45A-OO</p>
<p>OH</p> <p>Hardened Surface</p> <p>GR Material</p>	Same general purpose silicone compound as above plus additional hardening of the top surface to facilitate handling and installation during complex assemblies.	<p>GR25A-OH</p> <p>Applications: Same as above, except hardened top surface allows handling without distortion in cases where this feature is required.</p>	<p>GR45A-OH</p>
<p>FO</p> <p>Nylon Mesh</p> <p>GR Material</p>	Same general purpose silicone compound as above plus mesh reinforcement stiffener to prevent stretching; i.e., elongation of die-cut holes.	<p>GR25A-FO</p> <p>Applications: Same as GR basic formula, plus specific construction for intricate die-cut shapes to prevent distortion of the die-cut shape during die-cutting and installation.</p>	<p>N/A</p>
<p>FH</p> <p>Hardened Surface</p> <p>Nylon Mesh</p> <p>GR Material</p>	Same general purpose silicone compound as above plus additional hardening of the top surface to facilitate handling and installation during complex assemblies, and mesh reinforcement stiffener to prevent stretching; i.e., elongation of die-cut holes.	<p>GR25A-FH</p> <p>Applications: Same as GR basic formula, plus specific construction with hardened top surface and mesh reinforcement for die-cutting and handling without distortion.</p>	<p>N/A</p>

Type 1

Typical Properties	Unit	SARCON® GR	SARCON® GR-H
Cross Section	Composition		
Extractable Volatiles	Content % Cyclodimethyl Siloxane	Fujipoly D4~D10 <0.0010 wt%	Fujipoly D4~D10 <0.0010 wt%
Continuous Use Flame Retardance	°C UL-94V standard	Fujipoly UL -60 to +200 UL94 V-0	Fujipoly UL -60 to +200 UL94 V-0
Dimensions Available	Thickness (mm)	Fujipoly 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3} 2.5 ^{±0.3} 3.0 ^{±0.3} 3.5 ^{±0.3} 4.0 ^{±0.4} 5.0 ^{±0.5}	Fujipoly 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.2} 2.5 ^{±0.3} 3.0 ^{±0.3} 3.5 ^{±0.3} 4.0 ^{±0.4} 5.0 ^{±0.5}
	Width (mm)	Fujipoly Pre-cut 200mm max.	Fujipoly Pre-cut 200mm max.
	Length (mm)	Fujipoly Pre-cut 300mm max.	Fujipoly Pre-cut 300mm max.
Packaging	Standard	Fujipoly	Fujipoly

Each Sheet is placed between top and bottom film liners for die cutting handling ease.

GR-d Series	Identifier	Test Method	50G-d	100G-d	150G-d	200G-d	250G-d	300G-d	350G-d	400G-d	500G-d	50G-Hd	100G-Hd	150G-Hd	200G-Hd	250G-Hd	300G-Hd	350G-Hd	400G-Hd	500G-Hd
Thickness	mm	Fujipoly	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}
Thermal Resistance	°C-in ² /W (°C-cm ² /W)	FTM P-3050 (ASTM D5470 Equivalent)	14.5 psi (100kPa)	0.69 (4.45)	1.03 (6.64)	1.39 (8.96)	1.52 (9.78)	2.10 (13.58)	2.35 (15.15)	2.56 (16.51)	3.25 (20.95)	0.62 (3.98)	1.15 (7.41)	1.64 (10.60)	1.92 (12.40)	2.60 (16.77)	2.59 (16.72)	3.19 (20.61)	3.26 (21.04)	3.64 (23.51)
			43.5 psi (300kPa)	0.53 (3.44)	0.81 (5.25)	1.16 (7.46)	1.13 (7.31)	1.71 (11.02)	1.77 (11.40)	2.00 (12.93)	2.42 (15.61)	0.52 (3.36)	1.01 (6.50)	1.39 (8.95)	1.57 (10.14)	2.00 (12.88)	2.26 (14.56)	2.35 (15.13)	2.56 (16.53)	2.95 (19.02)
			72.5 psi (500kPa)	0.46 (2.96)	0.73 (4.71)	1.02 (6.59)	0.97 (6.24)	1.47 (9.49)	1.48 (9.58)	1.66 (10.70)	2.03 (13.11)	0.48 (3.12)	0.95 (6.11)	1.22 (7.88)	1.36 (8.79)	1.68 (10.87)	1.89 (12.18)	1.94 (12.52)	2.17 (14.01)	2.50 (16.14)
Color	Visual	Fujipoly																		
Thermal Conductivity	Watt/m·K	FTM P-1620 (ASTM D2326 Equivalent)																		
Volume Resistivity	MΩ·m	ASTM D257																		
Withstand Voltage	kV/min	ASTM D149																		
Specific Gravity	-	ASTM D792																		
Hardness	Shore OO	ASTM D2240																		
Elongation	%	ASTM D412																		
	psi @ 10% (N @ 10%)	Fujipoly (area=25x25mm)	30 (127)	28 (123)	26 (113)	23 (100)	18 (76)	14 (60)	13 (55)	11 (48)	10 (41)	48 (205)	45 (194)	35 (149)	28 (121)	25 (107)	18 (78)	16 (68)	13 (56)	11 (49)
Compression	50% sustain after 1 minute		92 (394)	89 (384)	75 (324)	70 (303)	62 (267)	56 (242)	54 (230)	46 (199)	36 (155)	209 (898)	136 (586)	76 (327)	64 (275)	57 (247)	56 (242)	53 (226)	47 (204)	46 (197)

GR-ae Series	Identifier	Test Method	50G-ae	100G-ae	150G-ae	200G-ae	250G-ae	300G-ae	350G-ae	400G-ae	500G-ae	50G-Hae	100G-Hae	150G-Hae	200G-Hae	250G-Hae	300G-Hae	350G-Hae	400G-Hae	500G-Hae
Thickness	mm	Fujipoly	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}
Thermal Resistance	°C-in ² /W (°C-cm ² /W)	FTM P-3050 (ASTM D5470 Equivalent)	14.5 psi (100kPa)	0.63 (4.08)	0.94 (6.09)	1.20 (7.74)	1.51 (9.74)	1.92 (12.42)	1.93 (12.47)	2.13 (13.74)	2.16 (13.92)	0.67 (4.31)	1.02 (6.59)	1.35 (8.72)	1.81 (11.68)	1.92 (12.42)	2.21 (14.28)	2.21 (14.28)	2.21 (14.28)	3.14 (20.27)
			43.5 psi (300kPa)	0.50 (3.21)	0.69 (4.44)	0.92 (5.92)	1.07 (6.88)	1.37 (8.86)	1.27 (8.20)	1.48 (9.55)	1.53 (9.85)	0.54 (3.47)	0.84 (5.39)	1.09 (7.02)	1.42 (9.14)	1.41 (9.11)	1.60 (10.34)	1.60 (10.34)	1.60 (10.34)	2.20 (14.20)
			72.5 psi (500kPa)	0.43 (2.78)	0.58 (3.76)	0.76 (4.93)	0.86 (5.52)	1.09 (7.04)	1.03 (6.67)	1.21 (7.78)	1.25 (8.09)	0.46 (2.96)	0.72 (4.66)	0.92 (5.92)	1.12 (7.24)	1.12 (7.23)	1.26 (8.11)	1.26 (8.11)	1.26 (8.11)	1.76 (11.38)
Color	Visual	Fujipoly																		
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2326 Equivalent)																		
Volume Resistivity	MΩ·m	ASTM D257																		
Withstand Voltage	kV/min	ASTM D149																		
Specific Gravity	-	ASTM D792																		
Hardness	Shore OO	ASTM D2240																		
Elongation	%	ASTM D412																		
	psi @ 10% (N @ 10%)	Fujipoly (area = 25x25mm)	27 (118)	30 (131)		17 (72)		8 (36)		4 (17)	3 (12)	37 (158)	40 (174)		15 (65)		9 (39)		6 (24)	5 (21)
Compression	50% sustain after 1 minute		89 (383)	63 (271)		52 (224)		27 (115)		14 (60)	12 (53)	141 (606)	114 (492)		58 (250)		46 (197)		30 (130)	25 (106)

XR-e Series	Identifier	Test Method	100X-e	150X-e	200X-e	30X-He	50X-He	100X-He	150X-He	200X-He
Thickness	mm	Fujipoly	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	0.3 ^{±0.1}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}
Thermal Resistance	°C-in ² /W (°C-cm ² /W)	FTM P-3050 (ASTM D5470 Equivalent)	14.5 psi (100kPa)	0.24 (1.56)	0.35 (2.26)	0.13 (0.81)	0.17 (1.12)	0.26 (1.66)	0.36 (2.33)	0.47 (3.06)
			43.5 psi (300kPa)	0.22 (1.43)	0.32 (2.04)	0.11 (0.71)	0.14 (0.92)	0.23 (1.47)	0.33 (2.11)	0.44 (2.82)
			72.5 psi (500kPa)	0.21 (1.33)	0.29 (1.87)	0.10 (0.66)	0.13 (0.85)	0.21 (1.38)	0.30 (1.94)	0.41 (2.65)
Color	Visual	Fujipoly								
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2326 Equivalent)								
Volume Resistivity	MΩ·m	ASTM D257								
Withstand Voltage	kV/min	ASTM D149								
Specific Gravity	-	ASTM D792								
Hardness	Shore OO	ASTM D2240								
Elongation	%	ASTM D412								
	psi @ 10% (N @ 10%)	Fujipoly (area = 25x25mm)	20 (84)	23 (98)	22 (93)	5 (24)	13 (58)	23 (100)	23 (99)	26 (113)
Compression	50% sustain after 1 minute		186 (799)	181 (777)	179 (771)	120 (515)	201 (865)	197 (847)	192 (826)	183 (787)



pre-cut max. size of 30X-He is 50x50mm.

Typical Properties

Unit

SARCON® GR-F2

SARCON® GR-HF2



Cross Section	Composition		
Extractable Volatiles	Content % Cyclodimethyl Siloxane	Fujipoly D4~D10 <0.0010 wt%	Fujipoly D4~D10 <0.0010 wt%
Continuous Use	°C	-60 to +200	-60 to +200
Flame Retardance	UL-94V standard	UL	UL
Dimensions Available	Thickness (mm)	Fujipoly 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3} 2.5 ^{±0.3} 3.0 ^{±0.3} 3.5 ^{±0.3} 4.0 ^{±0.4} 5.0 ^{±0.5}	Fujipoly 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.3} 2.0 ^{±0.3} 2.5 ^{±0.3} 3.0 ^{±0.3} 3.5 ^{±0.3} 4.0 ^{±0.4} 5.0 ^{±0.5}
	Width (mm)	Fujipoly Pre-cut 200mm max.	Fujipoly Pre-cut 200mm max.
	Length (mm)	Fujipoly Pre-cut 300mm max.	Fujipoly Pre-cut 300mm max.
Packaging	Standard	Fujipoly Each Sheet is placed between top and bottom film liners for die cutting handling ease.	Fujipoly Each Sheet is placed between top and bottom film liners for die cutting handling ease.

GR-d Series	Identifier	Test Method	50G-F2d	100G-F2d	150G-F2d	200G-F2d	250G-F2d	300G-F2d	350G-F2d	400G-F2d	500G-F2d	50G-HF2d	100G-HF2d	150G-HF2d	200G-HF2d	250G-HF2d	300G-HF2d	350G-HF2d	400G-HF2d	500G-HF2d
Thickness	mm	Fujipoly	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}
Thermal Resistance	°C-in ² /W		14.5 psi	0.63	1.15	1.68	2.00	2.48	2.97	3.12	3.53	4.20	0.63	1.17	1.59	2.07	2.61	2.89	3.35	4.22
	(°C-cm ² /W)		(100kPa)	(4.06)	(7.41)	(10.81)	(12.93)	(16.02)	(19.18)	(20.10)	(22.75)	(27.12)	(4.04)	(7.56)	(10.27)	(13.33)	(16.81)	(18.66)	(21.63)	(27.23)
		FTM P-3050	43.5 psi	0.60	1.03	1.44	1.69	2.05	2.42	2.47	2.86	3.17	0.59	1.07	1.40	1.79	2.15	2.39	2.71	2.85
		(ASTM D5470 Equivalent)	(300kPa)	(3.89)	(6.67)	(9.31)	(10.92)	(13.20)	(15.64)	(15.92)	(18.43)	(20.45)	(3.82)	(6.93)	(9.03)	(11.55)	(13.85)	(15.39)	(17.48)	(21.50)
			72.5 psi	0.57	0.94	1.30	1.52	1.81	2.13	2.18	2.47	2.63	0.56	1.00	1.28	1.62	1.95	2.13	2.41	2.52
			(500kPa)	(3.67)	(6.09)	(8.41)	(9.80)	(11.67)	(13.77)	(14.05)	(15.93)	(16.95)	(3.63)	(6.44)	(8.25)	(10.46)	(12.55)	(13.74)	(15.53)	(16.28)
Color	Visual	Fujipoly					Gray										Gray			
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2326 Equivalent)					1.5										1.5			
Volume Resistivity	MΩ·m	ASTM D257					1x10 ⁹										1x10 ⁹			
Withstand Voltage	kV/min	ASTM D149					9										9			
Specific Gravity	-	ASTM D792					2.6										2.6			
Hardness	Shore OO	ASTM D2240					49										49			
Elongation	%	ASTM D412					60										60			
	psi @ 10%	Fujipoly	39	35	35	26	19	17	15	12	11	51	47	46	36	34	28	223	21	16
Compression	(N @ 10%)	(area=25x25mm)	(167)	(152)	(151)	(110)	(80)	(72)	(64)	(53)	(47)	(221)	(203)	(197)	(154)	(145)	(119)	(960)	(88)	(70)
	50% sustain after 1 minute		220	163	114	71	59	46	43	41	41	273	235	181	116	95	89	73	73	57
			(945)	(702)	(489)	(306)	(253)	(196)	(185)	(178)	(175)	(1174)	(1008)	(776)	(498)	(409)	(381)	(316)	(315)	(247)

GR-ae Series	Identifier	Test Method	50G-F2ae	100G-F2ae	150G-F2ae	200G-F2ae	250G-F2ae	300G-F2ae	350G-F2ae	400G-F2ae	500G-F2ae	50G-HF2ae	100G-HF2ae	150G-HF2ae	200G-HF2ae	250G-HF2ae	300G-HF2ae	350G-HF2ae	400G-HF2ae	500G-HF2ae
Thickness	mm	Fujipoly	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}
Thermal Resistance	°C-in ² /W		14.5 psi	0.66	1.19	2.00						0.69	1.24	2.03						
	(°C-cm ² /W)		(100kPa)	0.64	1.06	1.64						0.67	1.10	1.72						
		FTM P-3050	43.5 psi	(4.13)	(6.81)	(10.58)						(4.35)	(7.10)	(11.10)						
		(ASTM D5470 Equivalent)	(300kPa)	0.60	0.96	1.41						0.64	0.99	1.5						
Color	Visual	Fujipoly	72.5 psi				Apricot										Apricot			
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2326 Equivalent)	(500kPa)				1.3										1.3			
Volume Resistivity	MΩ·m	ASTM D257																		
Withstand Voltage	kV/min	ASTM D149					12										11			
Specific Gravity	-	ASTM D792																		
Hardness	Shore OO	ASTM D2240																		
Elongation	%	ASTM D412																		
	psi @ 10%	Fujipoly	30	21		16						31	40		19					
Compression	(N @ 10%)	(area = 25x25mm)	(127)	(91)		(68)						(133)	(171)		(80)					
	50% sustain after 1 minute		179	112		58						227	159		83					
			(771)	(482)		(248)						(978)	(682)		(359)					

XR-e Series	Identifier	Test Method	XR-F	XR-HF
Thickness	mm	Fujipoly		
Thermal Resistance	°C-in ² /W			
	(°C-cm ² /W)			
		FTM P-3050		
		(ASTM D5470 Equivalent)		
		43.5 psi		
		(300kPa)		
		72.5 psi		
		(500kPa)		
Color	Visual	Fujipoly		
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2326 Equivalent)	Not Available At This Time	Not Available At This Time
Volume Resistivity	MΩ·m	ASTM D257		
Withstand Voltage	kV/min	ASTM D149		
Specific Gravity	-	ASTM D792		
Hardness	Shore OO	ASTM D2240		
Elongation	%	ASTM D412		
	psi @ 10%	Fujipoly		
Compression	(N @ 10%)	(area = 25x25mm)		
	50% sustain after 1 minute			

Type 1



Typical Properties			Unit	SARCON® XR	SARCON® XR-H
Cross Section	Composition	Fujipoly		 GR Material	 GR Material
Extractable Volatiles	Content %	Fujipoly		D4~D10 <0.0010 wt%	D4~D10 <0.0010 wt%
Continuous Use	°C	Fujipoly		-60 to +200	-60 to +200
Flame Retardance	UL-94V standard	UL		UL94 V-0	UL94 V-0
Dimensions Available	Thickness (mm)	Fujipoly		1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3}	0.3 ^{±0.1} 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3}
	Width (mm)	Fujipoly		Pre-cut 200mm max.	Pre-cut 200mm max.
	Length (mm)	Fujipoly		Pre-cut 300mm max.	Pre-cut 300mm max.
Packaging	Standard	Fujipoly		Each Sheet is placed between top and bottom film liners for die cutting handling ease.	

XR-j Series	Identifier	Test Method	100X-j	150X-j	200X-j	30X-Hj	50X-Hj	100X-Hj	150X-Hj	200X-Hj
Thickness	mm	Fujipoly	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	0.3 ^{±0.1}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}
Thermal Resistance	°C·in ² /W		14.5 psi	0.17	0.25	0.31	0.10	0.12	0.19	0.29
	(°C·cm ² /W)		(100kPa)	(1.09)	(1.61)	(2.00)	(0.64)	(0.76)	(1.20)	(1.87)
		FTM P-3050	43.5 psi	0.16	0.23	0.26	0.09	0.10	0.16	0.25
		(ASTM D5470 Equivalent)	(300kPa)	(1.01)	(1.46)	(1.67)	(0.59)	(0.65)	(1.04)	(1.62)
			72.5 psi	0.15	0.21	0.12	0.09	0.09	0.15	0.23
			(500kPa)	(0.95)	(1.35)	(0.76)	(0.55)	(0.61)	(0.95)	(1.49)
Color	Visual	Fujipoly								
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2328 Equivalent)								
Volume Resistivity	MΩ·m	ASTM D257								
Withstand Voltage	kV/min	ASTM D149								
Specific Gravity	-	ASTM D792								
Hardness	Shore OO	ASTM D2240								
Elongation	%	ASTM D412								
Compression	psi @ 10%	Fujipoly	24	28	31	10	29	24	29	30
	(N @10%)	(area = 25x25mm)	(103)	(123)	(132)	(45)	(124)	(103)	(123)	(129)
	50% sustain after 1 minute		181	178	166	137	204	187	181	172
			(778)	(767)	(713)	(591)	(876)	(805)	(776)	(741)

pre-cut max. size of 30X-Hj is 50x50mm.

XR-m Series	Identifier	Test Method	30X-m	50X-m	100X-m	150X-m	200X-m
Thickness	mm	Fujipoly	0.3 ^{±0.06}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}
Thermal Resistance	°C·in ² /W		14.5 psi	0.07	0.08	0.14	0.20
	(°C·cm ² /W)		(100kPa)	(0.44)	(0.49)	(0.92)	(1.30)
		FTM P-3050	43.5 psi	0.06	0.06	0.13	0.18
		(ASTM D5470 Equivalent)	(300kPa)	(0.38)	(0.40)	(0.81)	(1.14)
			72.5 psi	0.04	0.06	0.12	0.16
			(500kPa)	(0.23)	(0.37)	(0.75)	(1.03)
Color	Visual	Fujipoly					
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2328 Equivalent)					
Volume Resistivity	MΩ·m	ASTM D257					
Withstand Voltage	kV/min	ASTM D149					
Specific Gravity	-	ASTM D792					
Hardness	Shore OO	ASTM D2240					
Elongation	%	ASTM D412					
Compression	psi @ 10%	Fujipoly	109	104	33	29	28
	(N @10%)	(area = 10x10mm)	(75)	(72)	(23)	(20)	(19)
	50% sustain after 1 minute		626	164	52	42	32
			(432)	(113)	(36)	(29)	(22)



pre-cut max. size of 30X-m is 150x200mm.

Typical Properties		Unit	SARCON® XR-F2		SARCON® XR-HF2	
Cross Section	Composition					
Extractable Volatiles	Content %	Fujipoly				
	Cyclodimethyl Siloxane					
Continuous Use	°C	Fujipoly				
Flame Retardance	UL-94V standard	UL				
Dimensions Available	Thickness (mm)	Fujipoly				
	Width (mm)	Fujipoly				
	Length (mm)	Fujipoly				
Packaging	Standard	Fujipoly				



XR-j Series	Identifier	Test Method	XR-F		XR-HF	
Thickness	mm	Fujipoly				
Thermal Resistance	°C·in²/W		14.5 psi			
	(°C·cm²/W)		(100kPa)			
		FTM P-3050	43.5 psi			
		(ASTM D5470 Equivalent)	(300kPa)			
			72.5 psi			
			(500kPa)			
Color	Visual	Fujipoly				
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2226 Equivalent)		Not Available At This Time		Not Available At This Time
Volume Resistivity	MΩ·m	ASTM D257				
Withstand Voltage	kV/min	ASTM D149				
Specific Gravity	-	ASTM D792				
Hardness	Shore OO	ASTM D2240				
Elongation	%	ASTM D412				
Compression	psi @ 10%	Fujipoly				
	(N @10%)	(area = 25x25mm)				
	50% sustain after 1 minute					

XR-m Series	Identifier	Test Method	XR-F		XR-HF	
Thickness	mm	Fujipoly				
Thermal Resistance	°C·in²/W		14.5 psi			
	(°C·cm²/W)		(100kPa)			
		FTM P-3050	43.5 psi			
		(ASTM D5470 Equivalent)	(300kPa)			
			72.5 psi			
			(500kPa)			
Color	Visual	Fujipoly				
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2226 Equivalent)		Not Available At This Time		Not Available At This Time
Volume Resistivity	MΩ·m	ASTM D257				
Withstand Voltage	kV/min	ASTM D149				
Specific Gravity	-	ASTM D792				
Hardness	Shore OO	ASTM D2240				
Elongation	%	ASTM D412				
Compression	psi @ 10%	Fujipoly				
	(N @10%)	(area = 10x10mm)				
	50% sustain after 1 minute					



Type 2

Typical Properties	Unit	SARCON® GR25A-OO	SARCON® GR25A-OH
Cross Section	Composition		
Extractable Volatiles	Content % Cyclodimethyl Siloxane	Fujipoly D4-D10 <0.0010 wt%	Fujipoly D4-D10 <0.0010 wt%
Continuous Use Flame Retardance	°C UL-94V standard	Fujipoly UL -60 to +200 UL94 V-0	Fujipoly UL -60 to +200 UL94 V-0
Dimensions Available	Thickness (mm) Width (mm) Length (mm)	Fujipoly Fujipoly Fujipoly 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3} 2.5 ^{±0.3} 3.0 ^{±0.3} 3.5 ^{±0.3} 4.0 ^{±0.3} 4.5 ^{±0.3} 5.0 ^{±0.3} Pre-cut 200mm max. Pre-cut 300mm max.	Fujipoly Fujipoly Fujipoly 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3} 2.5 ^{±0.3} 3.0 ^{±0.3} 3.5 ^{±0.3} 4.0 ^{±0.3} 4.5 ^{±0.3} 5.0 ^{±0.3} Pre-cut 200mm max. Pre-cut 300mm max.
Packaging	Standard	Fujipoly	Fujipoly



			SARCON® GR25A-OO-										SARCON® GR25A-OH-										
GR25A Series	Identifier	Test Method	50GY	100GY	150GY	200GY	250GY	300GY	350GY	400GY	450GY	500GY	50GY	100GY	150GY	200GY	250GY	300GY	350GY	400GY	450GY	500GY	
Thickness	mm	Fujipoly		0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	4.5 ^{±0.3}	5.0 ^{±0.3}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	3.5 ^{±0.3}	4.0 ^{±0.3}	4.5 ^{±0.3}	5.0 ^{±0.3}
Thermal Resistance	°C·in ² /W		14.5 psi	0.23	0.43	0.59	0.78	0.88	1.07	1.24	1.35	1.49	1.62	0.29	0.46	0.70	0.94	1.12	1.19	1.31	1.62	1.77	1.86
	(°C·cm ² /W)		(100kPa)	(1.48)	(2.76)	(3.82)	(5.00)	(5.65)	(6.90)	(7.97)	(8.69)	(9.60)	(10.47)	(1.85)	(2.99)	(4.53)	(6.07)	(7.23)	(7.69)	(8.46)	(10.47)	(11.43)	(12.02)
		FTM P-3050	43.5 psi	0.19	0.33	0.46	0.59	0.65	0.75	0.85	0.90	0.98	1.08	0.27	0.42	0.60	0.73	0.85	0.94	1.04	1.26	1.31	1.44
		(ASTM D5470 Equivalent)	(300kPa)	(1.21)	(2.12)	(2.95)	(3.78)	(4.21)	(4.81)	(5.50)	(5.81)	(6.31)	(6.96)	(1.76)	(2.70)	(3.86)	(4.70)	(5.49)	(6.05)	(6.70)	(8.12)	(8.48)	(9.27)
Color			72.5 psi	0.17	0.29	0.40	0.49	0.55	0.62	0.71	0.76	0.82	0.91	0.27	0.41	0.56	0.65	0.73	0.81	0.88	1.04	1.14	1.19
	Visual	Fujipoly	(500kPa)	(1.10)	(1.87)	(2.57)	(3.17)	(3.56)	(4.02)	(4.55)	(4.87)	(5.31)	(5.88)	(1.72)	(2.65)	(3.61)	(4.17)	(4.72)	(5.25)	(5.70)	(6.70)	(7.38)	(7.66)
	Thermal Conductivity																						
	Watt/m·K	FTM P-1620 (ASTM D2326 Equivalent)																					
Volume Resistivity	MΩ·m																						
Withstand Voltage	kV/min	ASTM D257																					
Specific Gravity	-	ASTM D149																					
Hardness	Shore OO	ASTM D792																					
Elongation	%	ASTM D2240																					
Compression																							
	psi@10%	Fujipoly		35	39	28	20	16	13	12	10	9	7	38.7	53.3	45.0	28.1	22.5	18.2	15.5	12.6	10.8	9.0
	(N@10%)	(area=25x25mm)		(155)	(172)	(124)	(89)	(71)	(59)	(52)	(44)	(38)	(33)	(172)	(237)	(200)	(125)	(100)	(81)	(69)	(56)	(48)	(40)
	50% sustain after 1 minute			873	799	695	594	489	430	390	360	345	333	1214	1127	969	782	653	581	478	453	431	418
				(454)	(412)	(369)	(320)	(271)	(238)	(216)	(202)	(189)	(179)	(913)	(739)	(543)	(497)	(403)	(351)	(281)	(256)	(241)	(230)

Typical Properties	Unit	SARCON® GR45A-OO	SARCON® GR45A-OH
Cross Section	Composition		
Extractable Volatiles	Content % Cyclodimethyl Siloxane	Fujipoly D4-D10 <0.0010 wt%	Fujipoly D4-D10 <0.0010 wt%
Continuous Use Flame Retardance	°C UL-94V standard	Fujipoly UL -60 to +200 UL94 V-0	Fujipoly UL -60 to +200 UL94 V-0
Dimensions Available	Thickness (mm) Width (mm) Length (mm)	Fujipoly Fujipoly Fujipoly 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3} 2.5 ^{±0.3} 3.0 ^{±0.3} 4.0 ^{±0.3} 5.0 ^{±0.3} Pre-cut 200mm max. Pre-cut 300mm max.	Fujipoly Fujipoly Fujipoly 0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3} 2.5 ^{±0.3} 3.0 ^{±0.3} 4.0 ^{±0.3} 5.0 ^{±0.3} Pre-cut 200mm max. Pre-cut 300mm max.
Packaging	Standard	Fujipoly	Fujipoly

GR45A Series	Identifier	Test Method	SARCON® GR45A-OO-										SARCON® GR45A-OH-									
Thickness	mm	Fujipoly	50GY	100GY	150GY	200GY	250G-Y	300GY	400GY	500GY			50GY	100G-Y	150GY	200GY	250GY	300GY	400GY	500GY		
Thermal Resistance	°C-in ² /W (°C-cm ² /W)	Fujipoly	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}			0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	2.5 ^{±0.3}	3.0 ^{±0.3}	4.0 ^{±0.3}	5.0 ^{±0.3}		
			14.5 psi	0.28	0.37	0.46	0.56	0.68	0.79	0.95	1.14		0.22	0.35	0.45	0.55	0.62	0.73	0.93	1.07		
			(100kPa)	(1.78)	(2.37)	(2.94)	(3.60)	(4.40)	(5.08)	(6.16)	(7.34)		(1.40)	(2.28)	(2.92)	(3.55)	(4.03)	(4.69)	(6.02)	(6.91)		
		FTM P-3050	43.5 psi	0.24	0.32	0.41	0.49	0.56	0.64	0.70	0.69		0.18	0.30	0.40	0.47	0.51	0.57	0.67	0.77		
		(ASTM D5470 Equivalent)	(300kPa)	(1.54)	(2.09)	(2.65)	(3.13)	(3.60)	(4.14)	(4.51)	(4.44)		(1.16)	(1.97)	(2.55)	(3.05)	(3.32)	(3.65)	(4.32)	(4.94)		
			72.5 psi	0.21	0.3	0.37	0.42	0.42	0.49	0.53	0.57		0.17	0.28	0.35	0.41	0.40	0.40	0.49	0.57		
			(500kPa)	(1.33)	(1.94)	(2.38)	(2.73)	(2.71)	(3.19)	(3.44)	(3.69)		(1.08)	(1.79)	(2.27)	(2.65)	(2.56)	(2.56)	(3.16)	(3.69)		
Color	Visual	Fujipoly																				
Thermal Conductivity	Watt/m-K	FTM P-1620 (ASTM D2328 Equivalent)																				
Volume Resistivity	MΩ·m	ASTM D257																				
Withstand Voltage	kV/min	ASTM D149																				
Specific Gravity	-	ASTM D792																				
Hardness	Shore OO	ASTM D2240																				
Elongation	%	ASTM D412																				
Compression	psi@10% (N@10%) 50% sustain after 1 minute	Fujipoly (area=25x25mm)	15.9	16.3	16.0	12.1	10.7	8.4	7.2	6.3			20.4	23.3	23.1	17.2	15.6	11.8	9.7	7.5		
			(70)	(72)	(69)	(52)	(46)	(36)	(31)	(27)			(90)	(103)	(102)	(76)	(69)	(52)	(43)	(33)		
			147.0	151.1	65.4	50.8	42.2	35.3	27.1	21.6			162.0	164.0	115.6	88.6	69.6	54.6	42.6	32.9		
			(649)	(667)	(282)	(219)	(182)	(152)	(117)	(93)			(715)	(724)	(510)	(391)	(307)	(241)	(188)	(145)		

Typical Properties	Unit	SARCON® GR25A-FO	SARCON® GR25A-FH
Cross Section	Composition		
Extractable Volatiles	Content % Fujipoly Cyclodimethyl Siloxane	D4~D10 <0.0010 wt%	D4~D10 <0.0010 wt%
Continuous Use	°C Fujipoly	-60 to +200	-60 to +200
Flame Retardance	UL-94V standard UL	V0 – V1 (please check individual product specifications)	V0 – V1 (please check individual product specifications)
Dimensions Available	Thickness (mm) Fujipoly	0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3}	0.5 ^{±0.1} 1.0 ^{±0.2} 1.5 ^{±0.2} 2.0 ^{±0.3}
	Width (mm) Fujipoly	Pre-cut 200mm max.	Pre-cut 200mm max.
	Length (mm) Fujipoly	Pre-cut 300mm max.	Pre-cut 300mm max.
Packaging	Standard Fujipoly	Each Sheet is placed between top and bottom film liners for die cutting handling ease.	

GR25A Series	Identifier	Test Method	SARCON® GR25A-FO-				SARCON® GR25A-FH-				
			50GY	100GY	150GY	200GY	50GY	100GY	150GY	200GY	
Thickness	mm	Fujipoly	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	0.5 ^{±0.1}	1.0 ^{±0.2}	1.5 ^{±0.2}	2.0 ^{±0.3}	
	°C·in²/W		14.5 psi	0.31	0.54	0.70	0.91	0.33	0.55	0.78	1.01
Thermal Resistance	(°C·cm²/W)		(100kPa)	(2.00)	(3.46)	(4.50)	(5.88)	(2.10)	(3.54)	(5.02)	(6.50)
		FTM P-3050	43.5 psi	0.29	0.47	0.61	0.76	0.31	0.52	0.70	0.86
		(ASTM D6470 Equivalent)	(300kPa)	(1.90)	(3.06)	(3.92)	(4.89)	(2.01)	(3.37)	(4.50)	(5.54)
			72.5 psi	0.29	0.43	0.56	0.69	0.30	0.49	0.64	0.77
			(500kPa)	(1.86)	(2.80)	(3.61)	(4.44)	(1.96)	(3.18)	(4.16)	(4.97)
Color	Visual	Fujipoly	Gray				Gray				
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2328 Equivalent)	2.8				2.8				
Volume Resistivity	MΩ·m	ASTM D257	3.6x10⁴				3.6x10⁴				
Withstand Voltage	kV/min	ASTM D149	-				-				
Specific Gravity	-	ASTM D792	258				258				
Hardness	Shore OO	ASTM D2240	50				50				
Elongation	%	ASTM D412	197				197				
Compression	psi@10%	Fujipoly	16.2	40.7	37.8	24.1	25.20	41.40	42.98	24.53	
	(N@10%)	(area=25x25mm)	72)	(181)	(168)	(107)	(112)	(184)	(191)	(109)	
	50% sustain after 1 minute		1038	1419	1323	1032	1153	1584	1460	1116	
			807)	(972)	(770)	(563)	(970)	(1176)	(916)	(647)	

Typical Properties	Unit	SARCON® GR45A-FO	SARCON® GR45A-FH
Cross Section	Composition		
Extractable Volatiles	Content % Fujipoly Cyclodimethyl Siloxane		
Continuous Use	°C Fujipoly		
Flame Retardance	UL-94V standard UL		
Dimensions Available	Thickness (mm) Fujipoly		
	Width (mm) Fujipoly		
	Length (mm) Fujipoly		
Packaging	Standard Fujipoly		

GR45A Series	Identifier	Test Method		
Thickness	mm	Fujipoly		
Thermal Resistance	°C·in²/W		14.5 psi	
			(100kPa)	
	FTM P-3050		43.5 psi	
	(ASTM D6470 Equivalent)		(300kPa)	
			72.5 psi	
			(500kPa)	
Color	Visual	Fujipoly	Not Available At This Time	
Thermal Conductivity	watt/m·k	FTM P-1620 (ASTM D2328 Equivalent)		
Volume Resistivity	MΩ·m	ASTM D257		
Withstand Voltage	kV/min	ASTM D149		
Specific Gravity	-	ASTM D792		
Hardness	Shore OO	ASTM D2240		
Elongation	%	ASTM D412		
Compression	psi@10%	Fujipoly		
	(N@10%)	(area=25x25mm)		
	50% sustain after 1 minute			

SARCON® Thermal Management Components

SARCON® Silicone Putty is a highly conformable, thermally conductive, non-flammable interface material.

Two formulations are available, GR-Pm and XR-Pe. The specifications for each can be found in the chart below.

The surface consistency is excellent for filling small air gaps and uneven mating surfaces, making reliable contact with various shapes and sizes of components.

- Very low compression force at high compression rate
- Suitable for gaps as small as 0.3mm or less
- UL94 V-0 certified
- Available in two formulations


AVAILABLE CONFIGURATIONS:

Sheets, Die-cuts

APPLICATIONS:


- Between chassis wall and heat sink
- Between CPU and heat sink
- Between semiconductor and heat sink
- Component to heat spreader

CONSTRUCTION:

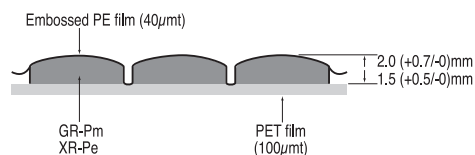

APPLICATION GUIDE:

To determine the size and volume of SARCON® to be used, follow this helpful example:

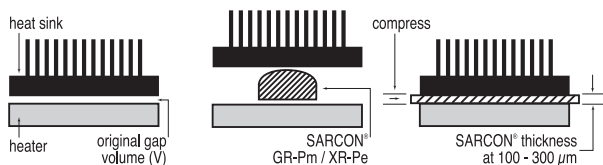

$$V = 45\text{mm}^3 \text{ (0.2mm H x 15mm W x 15mm L)}$$

$$\sqrt{45 \text{ (V)} \div 2 \text{ (thickness)}} \text{ note: allows 50\% compression}$$

$$= 4.74\text{mm}; \text{ use } 5\text{mm} \times 5\text{mm} @ 2.0\text{mm thickness}$$

Part Number Nomenclature:

200 GR-Pm - 100 x 100

Length (mm) • Pre-cut 300 max.
Width (mm) • Pre-cut 200 max.

SARCON® material type:

• GR-Pm • XR-Pe

Thickness (mm) • 2.0 • 1.5

UL FILE NUMBER: E58126

TYPICAL CHARACTERISTICS:

Test Property	Unit	GR-Pm	XR-Pe	Method
Thermal Conductivity	Watt/m•K	6	11	ASTM D5470
Thermal Resistance Compression	°C•in²/W	0.32	0.22	ASTM D5470
30%		0.25	0.18	
50%		0.18	0.12	
70%		0.08	0.06	
(original thickness 2.0mm)				
Flame Retardancy	UL94	V-0	V-0	UL94
Operating Temperature	Max. Range	-60 to +200	-60 to +200	Fujipoly
	Recommended Range	-40 to +150	-40 to +150	
Color	Visual	Dark Reddish Gray	Light Gray	–
Plasticity	mm	0.23	0.25	ASTM D962
Specific Gravity	-	3.1	3.3	ASTM D792
Volume Resistivity	MΩ•m	1 x 10⁶	7 x 10⁶	ASTM D257
Breakdown Voltage	kV/mm	13	11	ASTM D149
Dielectric Constant: 50Hz	-	6.4	NA	ASTM D149
1kHz		6.4	7.5	
1MHz		6.4	7.5	
Dissipation Factor: 50Hz	-	0.035	NA	ASTM D149
1kHz		0.005	0.018	
1MHz		0.001	0.008	
Compression: 10%	N	3.9	7.8	Fujipoly
(original thickness 2.0mm) 50% Sustain	N	13.7	19.6	

DESCRIPTION:

- Sarcon® XR-Um, XR-v: Silicone (putty) compound
- Sarcon® XR-Um-AL, XR-v-AL: Silicone (putty) compound with Aluminum film (10µmT)


APPLICATIONS:

- Thermal transfer from CPU and other heat generating devices to heat sink


	Unit	XR-Um	XR-Um-AL	XR-v	XR-v-AL	Method
Thermal Conductivity	W/m-K	17	17	6	6	ASTM D5470
Flame Retardancy	UL94	V-0	V-0 equivalent	V-0	V-0 equivalent	UL94

TYPICAL CHARACTERISTICS:

Test Property	Unit		14.5 psi (100kPa)	43.5 psi (300kPa)	72.5 psi (500kPa)
Thermal Resistance	°C·in²/W (°C·cm²/W)	20X-Um	0.02	0.02	0.02
			(0.16)	(0.12)	(0.11)
		30X-Um	0.03	0.03	0.02
			(0.20)	(0.17)	(0.15)
		40X-Um	0.05	0.04	0.04
			(0.30)	(0.27)	(0.25)
		50X-Um	0.06	0.05	0.04
			(0.36)	(0.31)	(0.28)
		20X-Um-AL	0.04	0.04	0.03
			(0.29)	(0.25)	(0.22)
Test Method	FTM P-3050	30X-Um-AL	0.05	0.04	0.04
			(0.35)	(0.28)	(0.26)
		40X-Um-AL	0.07	0.05	0.04
			(0.42)	(0.33)	(0.29)
		50X-Um-AL	0.08	0.06	0.05
			(0.50)	(0.38)	(0.31)
		11X-v	0.02	0.01	0.01
			(0.13)	(0.09)	(0.08)
		11X-v-AL	0.06	0.04	0.03
			(0.38)	(0.24)	(0.17)

SARCON® XR-Um:

Item	Size	Tolerance	
Width (mm)	10.0 - 50.0	± 1.0	XR-v, XR-Um
Length (mm)	10.0 - 50.0	± 1.0	XR-v, XR-Um
Thickness (mm)	0.11	± 0.03	XR-v
	0.20	± 0.04	XR-Um
	0.30	± 0.06	XR-Um
	0.40	± 0.08	XR-Um
	0.50	± 0.10	XR-Um

SARCON® XR-Um-AL:

Item	Size	Tolerance	
Width (mm)	10.0 - 50.0	± 1.0	XR-v-AL, XR-Um-AL
Length (mm)	10.0 - 50.0	± 1.0	XR-v-AL, XR-Um-AL
Thickness (mm)	0.11	± 0.03	XR-v-AL
	0.20	± 0.04	XR-Um-AL
	0.30	± 0.06	XR-Um-AL
	0.40	± 0.08	XR-Um-AL
	0.50	± 0.10	XR-Um-AL

All dimensions in millimeters

Sarcon® XR-Um and XR-v is the highest thermally conductive thin film putty type silicone. The material's putty nature greatly contributes to reduction of contact resistance and consequently to its low thermal resistance. It is a customer friendly material due to its easy application by printing.

Sarcon® XR-Um-AL, XR-v-AL has one surface with aluminum film, which enables users to remove the carrier film after installation (before operation) with no-pull-out effect.

- Putty nature enables low contact thermal resistance
- Low Molecular Weight Siloxane content is very low
- Has a flame retardancy of UL specification 94 V-0

UL FILE NUMBER: E58126

DURABILITY:

Test Conditions	20X-Um 15x15	11X-v 15x15
+120°C Aging	Initial	0.03
	250 hrs	0.03
	500 hrs	0.03
	1,000 hrs	0.03
		0.23
+150°C Aging	Initial	0.03
	250 hrs	0.04
	500 hrs	0.04
	1,000 hrs	0.04
		0.23
+85°C 85%RH Aging	Initial	0.03
	250 hrs	0.03
	500 hrs	0.03
	1,000 hrs	0.03
		0.20
-40°C to +125°C Heat Shock	Initial	0.03
	250 hrs	0.03
	500 hrs	0.03
	1,000 hrs	0.03
		0.26

EXTRACTABLE VOLATILE:


Low Molecular Weight Siloxane Content

D _n	XR-Um	XR-v	Test Method
Total less D ₂₀	Less than 0.0010 wt%	Less than 0.10 wt%	Gas Chromatographic Analysis by Abstracting Acetone (XR-Um) Carbon Tetrachloride (XR-v)

Part Number Nomenclature:**30 - XR-Um - 10 - 10**

- Length (mm) • 10.0 - 50.0
- Width (mm) • 10.0 - 50.0
- SARCON® material type:
 - XR-Um • XR-Um-AL
- Thickness (mm) • 0.2 - 0.5 (XR-Um) • 0.11 (XR-V)

SARCON[®] Thermal Management Components

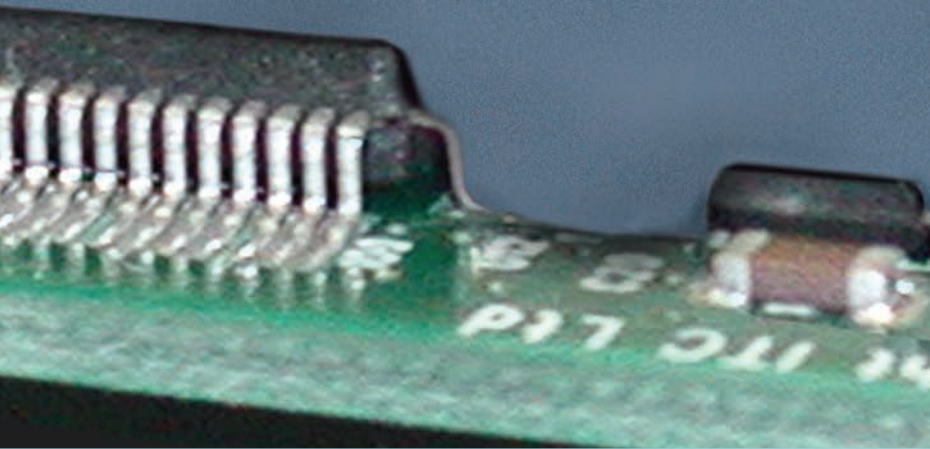

SARCON[®] GR-Sd and GR-SL are two of the lowest modulus type of Thermal Gap Filler Pad material available. Ideally suited for applications requiring low compression force on the component.

- **Absolute lowest modulus with high adhesion**
- **Easily fills air gaps, uneven surfaces**
- **Lower thermal resistance due to complete surface contact**
- **Low molecular silicone content is compliant with Bellcore specification TR-NWT-000930**


AVAILABLE CONFIGURATIONS:

Sheets


APPLICATIONS:

- Semiconductors to heat sink
- Chassis walls to other surfaces
- Components to heat spreader
- CD-ROM, DVD-ROM cooling

CONSTRUCTION:

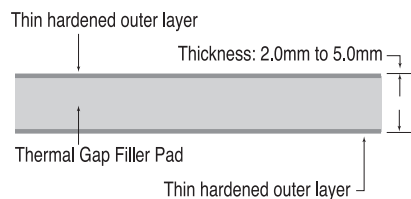

APPLICATION GUIDE:

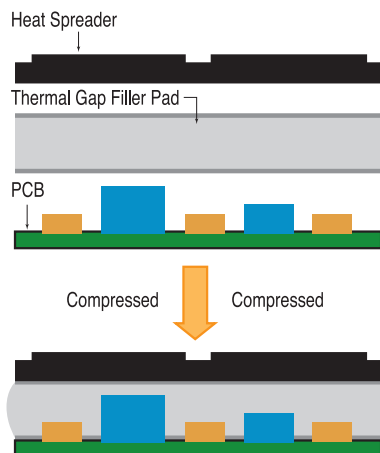

UL FILE NUMBER: E58126

TYPICAL CHARACTERISTICS: **Note: Maximum compression is 50%**

Test Property	Unit		Measure				Method
			GR-Sd		GR-SL		
Thickness	mm		2.5	5.0	2.5	5.0	—
Thermal Conductivity	Watt/m·K		1.5		2.7*		ASTM D5470 *ASTM D2326
Thermal Resistance		14.5 psi	1.70	2.65	0.94	1.69	Fujipoly
	°C·in²/W (100kPa)	(10.97)	(17.10)	(6.05)	(10.91)		
	°C·in²/W	43.5 psi	1.27	1.97	0.76	1.17	
	°C·cm²/W (300kPa)	(8.21)	(12.73)	(4.90)	(7.56)		
	°C·cm²/W	72.5 psi	1.26	1.63	0.51	0.89	
		(500kPa)	(8.14)	(10.49)	(3.30)	(5.75)	
Flame Retardancy	UL94		V-1		V-0		UL94
Operating Temperature	Maximum Range		-60 to +200		-60 to +200		Fujipoly
	Recommended Range		-40 to +150		-40 to +150		
Color	Visual		Gray		Gray		—
Tensile Strength	MPa		0.1		0.06		ASTM D412
Breakdown Voltage	kV/mm		14		15		ASTM D149
Compression	N	10%	60	22	28	18	Fujipoly
(area = 25 x 25 mm)		50% sustain	178	89	196	72	

Part Number Nomenclature:

250 GR-Sd - 100 x 100

- Length (mm)
- Width (mm)
- SARCON[®] material type • GR-Sd • GR-SL
- Thickness (mm)
- Pre-cut 300 max.
- Pre-cut 200 max.
- 2.5
- 5.0

SARCON[®] Thermally Conductive Greases

Sarcon[®] SG-07SL and SG-26SL are highly thermally conductive, non-reactive silicone-based greases that offer low thermal resistance and maintain a non-flowable composition. Unique binding agents and product formulation ensure the lowest amount of bleed and evaporation. Suited for thin bond line applications.

Sarcon[®] SG-07NS, SG-26NS and SG-42NS are non-silicone, polysynthetic-based thermal greases that have high thermal conductivity properties. Infused with heat-conductive metal oxides, this non-migrating material operates consistently in high temperatures. Sarcon[®] non-silicone greases offer all the benefits of a silicone-based compound without the problem of contamination.



TYPICAL PROPERTIES:

	Unit	SG 07SL	SG 26SL	SG 07NS	SG 26NS	SG 42NS
Type	–	Silicone	Silicone	Non-Silicone	Non-Silicone	Non-Silicone
Specific Gravity, @ 25°C	–	2.2	2.2	2.4	2.2	2.4
Viscosity*	Cps	160,000	406,000	250,000	480,000	502,000
Flow Rate**	grams/minute	95	6	75	8	6
Color	–	White	Gray	White	Gray	Gray
Evaporation, @ 200°C, 24hrs.	%/Wt	0.52	0.44	0.68	0.5	0.46
Thermal Conductivity	W/m.°K	0.75	2.6	0.75	2.6	4.2
Volume Resistivity	Ohm-cm	2.1×10^{14}	2.8×10^{14}	1.4×10^{14}	2.1×10^{14}	1.8×10^{14}
Dielectric Strength	V/mil	386	412	314	392	219
Operating Temperature Range	°C	-55 to 205	-55 to 205	-55 to 200	-55 to 200	-55 to 200

*Viscosity Data: Brookfield HB- DV-II+ Pro/Helipath. Speed: 50 RPM.

** Flow test: 30cc Syringe, 0.09" orifice at 25PSI/min.

FEATURES:

- Silicone and non-silicone formulations
- Thermal conductivity up to 4.2 W/m°K
- Low bleed and evaporation
- No migration for non-silicone formulations over wide temperature range
- Non-toxic
- Thin bond lines 1 mil
- Easy to apply and re-work

APPLICATIONS:

- Standard dc/dc power converter and dc/ac inverter
- High performance CPUs
- Between any heat generating semiconductor and heat sink
- Custom power modules
- Telecommunications and automotive electronics

PACKAGING OPTIONS:

- Pre-filled syringes: 3cc (6g), 10cc (28g), 30cc (72g)
- Jar containers: 1 lb. (454g)
- Custom packaging: Available on request

SARCON® "Form in Place" Gap Filler

SARCON® SPG-15A is a highly conformable/thermally conductive, high viscosity type silicone compound. It provides a thermal solution for the recent trends of integrating higher frequency electronics into smaller devices. SARCON® SPG-15A easily forms and adheres to most surfaces, shapes, and sizes of components.

SARCON® SPG-15A makes complete and reliable physical contact with the component and opposing surfaces. It provides handling properties that are superior to thermal grease & potting materials.

- Thermal transfer from heat-generating device to heat spreader or heat sink.


FEATURES:

- Fill large gaps while providing superior thermal transfer
- Conformable with very low compression forces
- Excellent vibration absorption capabilities
- Maintains all initial properties across a wide temperature range
- Used to "Form-in-Place" and remain form stable
- Requires no heat curing
- Will not cause corrosion on any metal surface

SPECIFICATIONS:

Property	Unit	SPG-15A	Method
Specific Gravity	—	2.8	ASTM D792
Viscosity	Pa·s	2,000	Fujipoly
Flow Rate	cc/min	8	Fujipoly
Thermal Conductivity	Watt/m·K	1.5	Fujipoly
Volume Resistivity	MΩ·m	1 x 10 ⁶	ASTM D257
Breakdown Voltage	kV/mm	10	ASTM D149
Withstand Voltage	kV/min	8	ASTM D149
TGA Weight Loss	wt%	0.10	After +150°C, 24hrs aging
Operating Temp. Range	°C	-40 to +150	Recommended
Thermal Resistance	°C·in ² /W	0.6 at 1.0mm gap	ASTM D5470
Compression Load/Modulus	N	Peak	Fujipoly
		Sustain	

PRODUCT CONSTRUCTION:

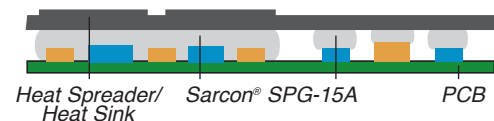

Part Number Nomenclature:

SPG-15A

Packaging Tube • 30 ml
 Cartridge • 325 ml
 Material Type

UL FILE NUMBER: E58126

RELIABILITY:

Thermal resistance under heat, cold, humid and thermal shock conditions.

+150°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	0.6	0.6	0.6	0.6	0.6
2.0mm	1.1	1.1	1.2	1.2	1.2
3.0mm	1.6	1.9	1.9	1.9	1.9

-40°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	0.6	0.6	0.6	0.6	0.6
2.0mm	1.1	1.1	1.1	1.1	1.1
3.0mm	1.6	1.6	1.6	1.6	1.6

+60°C 95%RH Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	0.6	0.6	0.6	0.6	0.6
2.0mm	1.1	1.1	1.2	1.2	1.2
3.0mm	1.6	1.9	1.9	1.9	1.9

-40°C to +125°C Heat Shock

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	0.6	0.6	0.6	0.6	0.6
2.0mm	1.1	1.2	1.3	1.3	1.3
3.0mm	1.6	2.0	2.0	2.0	2.0

Unit of Thermal Resistance: °C·in²/W based on ASTM D5470 Test Method.

Contact Surface: 3.14cm² (0.49in²)

Filled SPG1-A material's weight: 1.0mm - 0.9g; 2.0mm - 1.8g; 3.0mm - 2.6g

Viscosity under heat, cold, humid and thermal shock conditions.

Test Conditions	Unit	Initial	1,000 hrs later
+150°C Aging	Pa·s*	2,000	3,100
-40°C Aging		2,000	2,000
+60°C 95%RH Aging		2,000	2,000
-40°C to +125°C Heat Shock		2,000	2,200

*Accurate Rotary Viscometer (RV1)

SARCON® "Form in Place" Gap Filler



SARCON® SPG-30A is a highly conformable/thermally conductive, high viscosity type silicone compound. It provides a thermal solution for the recent trends of integrating higher frequency electronics into smaller devices. SARCON® SPG-30A easily forms and adheres to most surfaces, shapes, and sizes of components.

SARCON® SPG-30A makes complete and reliable physical contact with the component and opposing surfaces. It provides handling properties that are superior to thermal grease & potting materials.

- Thermal transfer from heat-generating device to heat spreader or heat sink.


FEATURES:

- Fill large gaps while providing superior thermal transfer
- Conformable with very low compression forces
- Excellent vibration absorption capabilities
- Maintains all initial properties across a wide temperature range
- Used to "Form-in-Place" and remain form stable
- Requires no heat curing
- Will not cause corrosion on any metal surface

SPECIFICATIONS:

Property	Unit	SPG-30A	Method
Specific Gravity	—	3.2	ASTM D792
Viscosity	Pa·s	2,700	Fujipoly
Flow Rate	cc/min	-	Fujipoly
Thermal Conductivity	Watt/m·K	3.2	Fujipoly
Volume Resistivity	MΩ·m	1 x 10 ⁶	ASTM D257
Breakdown Voltage	kV/mm	15	ASTM D149
Withstand Voltage	kV/min	-	ASTM D149
TGA Weight Loss	wt%	-	After +150°C, 24hrs aging
Operating Temp. Range	°C	-40 to +150	Recommended
Thermal Resistance	°C·in ² /W	0.3 at 1.0mm gap	ASTM D5470
Compression Load/Modulus	N	Peak	Fujipoly
		Sustain	

PRODUCT CONSTRUCTION:

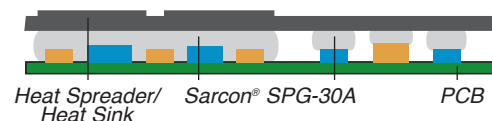

Part Number Nomenclature:

SPG-30A

Packaging Tube • 30 ml
Cartridge • 325 ml
Material Type

UL FILE NUMBER: E58126

RELIABILITY:

Thermal resistance under heat, cold, humid and thermal shock conditions.

+150°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	0.3	0.3	0.3	0.3	0.3
2.0mm	0.5	0.6	0.6	0.6	0.6
3.0mm	0.8	0.8	0.9	0.9	0.9

-40°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	0.3	0.3	0.3	0.3	0.3
2.0mm	0.5	0.5	0.5	0.5	0.5
3.0mm	0.8	0.9	0.9	0.9	0.9

+60°C 95%RH Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	0.3	0.3	0.3	0.3	0.2
2.0mm	0.5	0.5	0.5	0.5	0.5
3.0mm	0.8	0.8	0.8	0.8	0.8

-40°C to +125°C Heat Shock

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	0.3	0.3	0.3	0.3	0.3
2.0mm	0.5	0.5	0.5	0.5	0.5
3.0mm	0.8	0.9	0.9	0.9	0.9

Unit of Thermal Resistance: °C·in²/W based on ASTM D5470 Test Method.

Contact Surface: 3.14cm² (0.49in²)

Filled SPG1-A material's weight: 1.0mm - 0.9g; 2.0mm - 1.8g; 3.0mm - 2.6g

Viscosity under heat, cold, humid and thermal shock conditions.

Test Conditions	Unit	Initial	1,000 hrs later
+150°C Aging	Pa·s*	2,000	3,100
-40°C Aging		2,000	2,000
+60°C 95%RH Aging		2,000	2,000
-40°C to +125°C Heat Shock		2,000	2,200

*Accurate Rotary Viscometer (RV1)

SARCON® "Form in Place" Gap Filler

Sarcon® SPG-20A is highly conformable/thermally conductive, low viscosity and easier dispensable type silicone compound. It provides a thermal solution for the recent trends of higher frequencies and integration in the development of electronic devices.

Sarcon® SPG-20A easily forms and adheres to most of surfaces, shapes, and sizes of components. Sarcon® SPG-20A makes complete and reliable physical contact with the component and opposing surfaces. It provides handling properties that are superior to thermal grease & potting materials. grease & potting materials.

• Thermal transfer from heat-generating device to heat spreader or heat sink.

FEATURES:

- Fill large gaps while providing superior thermal transfer.
- Conformable with very low compression forces.
- Excellent vibration absorption capabilities.
- Maintains all initial properties across a wide temperature range.
- Used to "Form-In-Place" and remain form stable.
- Requires no heat curing.
- Will not cause corrosion on any metal surface.

UL FILE NUMBER: E58126

RELIABILITY:

Thermal resistance under heat, cold, humid and thermal shock conditions.

SPECIFICATIONS:

Property	Unit	SPG-20A	Method
Specific Gravity	—	2.9	JIS K 6220/ASTM D792
Viscosity	Pa·s	600	Fujipoly
Flow Rate	cc/min	-	Fujipoly
Thermal Conductivity	Watt/m·K	2.0	Fujipoly
Volume Resistivity	MΩ·m	1 x 10 ⁶	ASTM D257
Breakdown Voltage	kV/mm	15	ASTM D149
Withstand Voltage	kV/min	-	ASTM D149
TGA Weight Loss	wt%	-	After +150°C, 24hrs aging
Operating Temp. Range	°C	-40 to +150	Recommended
Thermal Resistance	°C·in ² /W	2.1	ASTM D5470
Compression Load/Modulus	N	Peak	Fujipoly
		Sustain	

+70°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
0.5mm	2.1	2.1	2.1	2.1	2.1

+120°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
0.5mm	2.1	2.0	2.0	2.1	2.1

+150°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
0.5mm	2.1	2.0	2.0	2.1	2.1

-40°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
0.5mm	2.1	2.2	2.1	2.2	2.2

+60°C 95%RH Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
0.5mm	2.2	2.2	2.2	2.2	2.3

-40°C to +125°C Heat Shock

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
0.5mm	2.1	2.2	2.5	2.6	2.6

Unit of Thermal Resistance: °C·in²/W based on ASTM D5470 Test Method.

Contact Surface: 3.14cm² (0.49in²)


Filled material's weight: .45g for 0.5mm gap

Viscosity under heat, cold, humid and thermal shock conditions.

Test Conditions	Unit	Initial	1,000 hrs later
+70°C Aging	Pa·s*	600	600
+120°C Aging		600	800
+150°C Aging		600	1700
-40°C to +125°C Heat Shock		600	300
+60°C 95%RH Aging		600	600
-40°C to +125°C Heat Shock		600	800

*5 Accurate Rotary Viscometer (RV1)

PRODUCT CONSTRUCTION:

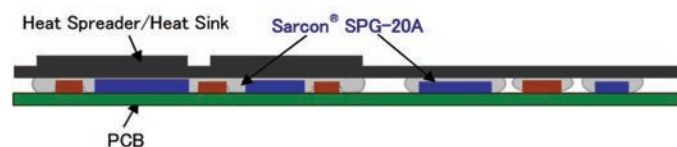

Part Number Nomenclature:

SPG-20A

Packaging Tube • 30 ml
 Cartridge • 325 ml
 Material Type

SARCON® "Form in Place" Gap Filler

SARCON® SPG-50A is a highly conformable/thermally conductive, high viscosity type silicone compound. It provides a thermal solution for the recent trends of integrating higher frequency electronics into smaller devices. SARCON® SPG-50A easily forms and adheres to most surfaces, shapes, and sizes of components.

SARCON® SPG-50A makes complete and reliable physical contact with the component and opposing surfaces. It provides handling properties that are superior to thermal grease & potting materials.

Thermal transfer from heat-generating device to heat spreader or heat sink.

FEATURES:

- Fill large gaps while providing superior thermal transfer
- Conformable with very low compression forces
- Excellent vibration absorption capabilities
- Maintains all initial properties across a wide temperature range
- Used to "Form-in-Place" and remain form stable
- Requires no heat curing
- Will not cause corrosion on any metal surface

UL FILE NUMBER: E58126

RELIABILITY:

Thermal resistance under heat, cold, humid and thermal shock conditions.

SPECIFICATIONS:


Property	Unit	SPG-50A	Method
Specific Gravity	—	3.2	JIS K 6220/ASTM D792
Viscosity	Pa·s	5,000	Fujipoly test method*1
		19,300	Fujipoly test method*2
Flow Rate	cc/min	-	Fujipoly
Thermal Conductivity	Watt/m·K	5.0	Hot Disk method
Volume Resistivity	MΩ·m	-	ASTM D257
Breakdown Voltage	kV/mm	-	ASTM D149
Withstand Voltage	kV-min	-	ASTM D149
TGA Weight Loss	wt%	-	After +150°C, 24hrs aging
Operating Temp. Range	°C	-40 to +150	Recommended
Thermal Resistance	°C·in²/W	1.8	ASTM D5470 equivalent*3
Compression Load/Modulus	Peak	-	Fujipoly
	Sustain	-	

*1: Accurate Rotary Viscometer (RV1) Shearing Speed:1(1/S)

*2: Accurate Rotary Viscometer (RV1) Shearing Speed:0.1(1/S)

*3: Contact Surface: 3.14 cm², (0.49 inch²) Filled material's weight: 1.0g for 1.0mm gap

PRODUCT CONSTRUCTION:



Part Number Nomenclature:

SPG-50A

Packaging Tube • 30 ml
 Cartridge • 325 ml
Material Type

+70°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	1.7	1.7	1.7	1.7	1.7

120°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	1.7	1.8	1.7	1.7	1.7

+150°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	1.7	1.7	1.8	1.8	1.8

-40°C Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	1.8	1.8	1.9	1.9	1.9

+60°C 95%RH Aging

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	1.8	1.8	1.8	1.8	1.7

-40°C to +125°C Heat Shock

Gaps	Initial	100hrs	250hrs	500hrs	1,000hrs
1.0mm	1.8	1.7	1.8	1.7	1.7

Unit of Thermal Resistance: °C·in²/W based on ASTM D5470 Test Method.
Contact Surface: 3.14cm² (0.49in²)

Filled SPG1-A material's weight: 1.0mm - 0.9g; 2.0mm - 1.8g; 3.0mm - 2.6g

Viscosity under heat, cold, humid and thermal shock conditions.

Test Conditions	Unit	Initial	100hrs	250hrs	500hrs	1,000hrs
+70°C Aging	Pa·s	19,300	19,100	20,500	20,000	20,400
+120°C Aging		19,300	19,800	19,100	19,500	19,400
+150°C Aging		19,300	18,800	21,400	18,700	24,00
-40°C Aging		19,300	20,000	20,600	19,200	19,500
+60°C 95%RH Aging		19,300	19,600	21,700	19,300	19,700
+40°C +125°C Heat Shock	*5	19,300	19,700	22,800	19,200	20,100

*5 Accurate Rotary Viscometer (RV1)

SARCON® Thermal Management Components

SARCON® NON-SILICONE GAP FILLER

SARCON® NR-c is a highly conformable, thermally conductive, non-flammable acrylate resin (non-silicone) sheet with thermally conductive fillers.

Available in sheets and die-cut forms for formal interface uses wherever gap filler pads are traditionally used.

- No silicone extractions
- Lower thermal resistance
- UL 94V-0
- Very thin 0.5mm thickness
- Available in sheets for scoring or die-cutting

UL FILE NUMBER: E58126

AVAILABLE CONFIGURATIONS:

Sheets, Die-cuts

TYPICAL CHARACTERISTICS:

Test Property	Unit	Measure	Method
Thermal Conductivity	Watt/m·K	1.5	-
Flame Retardancy	UL94	V-0	-
Operating Temperature		-40° to +105°	-
Color	-	Light Gray	-
Specific Gravity	-	2.1	A
Hardness	Asker-C (Shore-00)	27 (53)	B
Tensile Strength	MPa	0.2	A
Elongation	%	150	A
Tear Strength	kN/m	1.5	A
Volume Resistivity	MΩ-m	2x10 ³	C
Breakdown Voltage	kV/mm	11	C

Specimen A = 2.0mm thickness

Specimen B = 20mm width x 60mm length x 10mm thickness

Specimen C = 120mm width x 120mm length x 1.0mm thickness

Part Number Nomenclature:

50 N-c 120 x 120

Length (mm) • 300 max.
Width (mm) • 200 max.

SARCON® N-c series N-c, N-Hc, N-Tc, N-HTc
Thickness (mm) • 50 = 0.5mm* • 100 = 1.00mm
• 200 = 2.00mm

*50N-Tc, 50N-HTc only

Thermal Resistance Unit: (°C·in²/W) (°C·cm²/W)

	14.5 psi (100kPa)	43.5 psi (300kPa)	72.5 psi (500kPa)
100N-c	1.02 (6.60)	0.78 (5.05)	0.61 (3.96)
150N-c	1.24 (8.01)	0.95 (6.12)	0.80 (5.13)
200N-c	1.75 (11.26)	1.32 (8.53)	1.08 (6.97)
300N-c	2.52 (16.24)	1.93 (12.45)	1.58 (10.19)
100N-Hc	1.03 (6.62)	0.86 (5.54)	0.77 (4.97)
150N-Hc	1.58 (10.21)	1.37 (8.85)	1.24 (7.99)
200N-Hc	2.10 (13.56)	1.71 (11.02)	1.48 (9.56)
300N-Hc	2.88 (18.60)	2.24 (14.43)	1.87 (12.08)
50N-Tc	0.62 (4.02)	0.59 (3.81)	0.57 (3.67)
100N-Tc	1.17 (7.55)	1.09 (7.06)	1.06 (6.81)
200N-Tc	1.69 (10.89)	1.57 (10.10)	1.45 (9.34)
300N-Tc	2.08 (13.44)	1.90 (12.25)	1.74 (11.23)
50N-HTc	0.68 (4.41)	0.66 (4.26)	0.64 (4.15)
100N-HTc	1.16 (7.50)	1.09 (7.05)	1.04 (6.70)
150N-HTc	1.66 (10.71)	1.55 (10.01)	1.45 (9.38)
200N-HTc	2.16 (13.97)	1.92 (12.39)	1.77 (11.43)
300N-HTc	3.08 (19.84)	2.55 (16.45)	2.23 (14.42)



SARCON® THIN FILM PROFILES IN ROLLS AND SHEETS

Flat stock in rolls or single sheets for your custom finishing. Can be die-cut or trimmed to any proprietary shape on your finishing equipment. Available in five thicknesses and all SARCON® formulations.

PART NUMBER NOMENCLATURE:

30 GTR - AD - 100 x 100


- Length · Rolls · 100 meters for up to 0.30mm
· 50 meters for all others
- Sheets · As specified in chart
- Width · See chart below
- Roll · R
- Sheet · S (GSR)
- Adhesive Option (not available for TR, HR, QR)
- Material Type · T for SARCON® TR · GHR for SARCON® GHR
· H for SARCON® HR · GSR for SARCON® GSR
· GTR for SARCON® GTR · Q for SARCON® QR
- Thickness (mm) · 15 (0.15 ±0.05) · 30 (0.30 ±0.1/±0.05)
· 20 (0.20 ±0.05) · 45 (0.45 ±0.05)
· 85 (0.85 ±0.05)

SHEETS: AVAILABLE DIMENSIONS

SARCON® Material	Thickness	Width	Length
TR	30 (0.30 +0.10/-0.00), 45 (0.45 +/-0.05), 85 (0.85 +/-0.05)	N/A	N/A
HR	30 (0.30 +0.10/-0.00), 45 (0.45 +/-0.05), 85 (0.85 +/-0.05)	N/A	N/A
GTR	15 (0.15 +0.02/-0.04), 20 (0.20 +0.02/-0.04), 30 (0.30 +0.10/-0.00)	N/A	N/A
GHR	15 (0.15 +0.02/-0.04), 20 (0.20 +0.02/-0.04), 30 (0.30 +0.10/-0.00)	N/A	N/A
GSR	20 (0.20 +/-0.05), 30 (0.30 +0.10/-0.00), 45 (0.45 +/-0.05), 85 (0.85 +/-0.05)	300.0	300.0
QR	30 (0.30 +0.10/-0.00), 45 (0.45 +/-0.05), 85 (0.85 +/-0.05)	N/A	N/A
GTR-AD (w/adhesive)	N/A	N/A	N/A
GHR-AD (w/adhesive)	N/A	N/A	N/A
GSR-AD (w/adhesive)	0.20, 0.30, 0.45, 0.85	300.0	300.0

ROLLS: AVAILABLE DIMENSIONS

SARCON® Material	Thickness	Width	Length
TR	0.30, 0.45, 0.85	36.0, 85.0	100.0 meters for all thicknesses up to 0.30 50.0 meters for thicknesses over 0.30
HR	0.30, 0.45, 0.85	36.0, 85.0	
GTR	0.15, 0.20, 0.30	10.0 min. - 475.0 max.	
GHR	0.15, 0.20, 0.30	10.0 min. - 475.0 max.	
GSR	N/A	N/A	
QR	0.30, 0.45, 0.85	36.0, 85.0	
GTR-AD (w/adhesive)	0.15, 0.20, 0.30	10.0 min. - 450.0 max.	
GHR-AD (w/adhesive)	0.15, 0.20, 0.30	18/24/36/50/70/100	
GSR-AD (w/adhesive)	N/A	N/A	

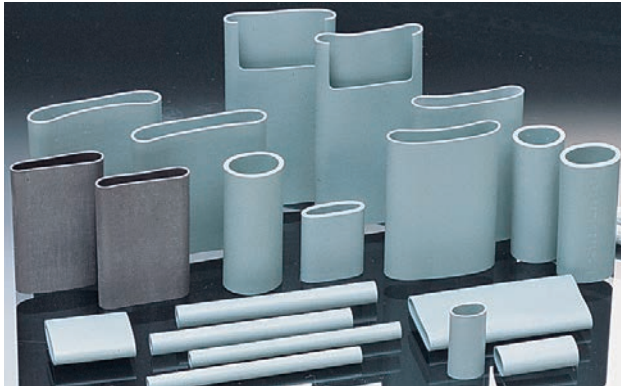

SARCON® "SLEEVE" SHAPE THERMAL EXTRUSIONS


Tube shapes available in three thicknesses. TR or HR formulations. The flexible structures conform to most applications. All standard items in stock; custom lengths and diameters available.

APPLICATIONS: Semiconductor packages, thermistors

PART NUMBER NOMENCLATURE:

30-T-11-25L	
Length (mm)	• 25 • 30 • 35
Inner diameter (mm)	• 11 • 13.5 • 17
Material Type	• T for SARCON® TR • H for SARCON® HR
Thickness (mm)	• 30 (0.30 ± 0.1) • 45 (0.45 ± 0.05) • 85 (0.85 ± 0.05)

Usable Transistors	Applicable SARCON® Tubes	Inner Diameter
TO-220 type	30T-11-25L, 30T-11-30L, 45T-11-25L, 45T-11-30L, 85T-11-25L, 85T-11-30L	11 ± 1
TO-3PF type	30T-13.5-25L, 30T-13.5-30L, 45T-13.5-25L, 45T-13.5-30L, 85T-13.5-25L, 85T-13.5-30L	13.5 ± 1
TO-3PL type	45T-17-35L, 85T-17-35L	17 ± 1

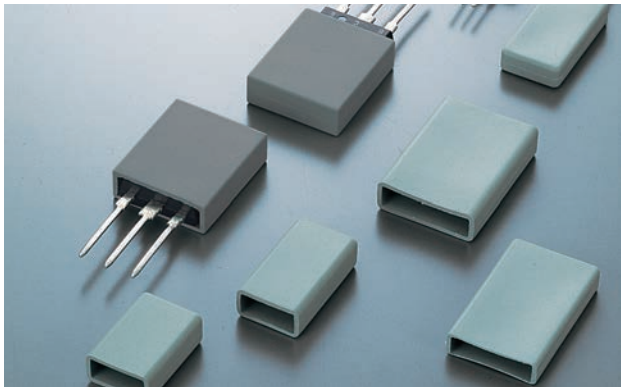


SARCON® "CASE" SHAPE THERMAL EXTRUSIONS

Box-shaped caps for transistors. High thermal dissipation rate. Open on one end; installs by just slipping over the desired components. Available in TR and HR materials. All standard items in stock; custom sizes available.

APPLICATIONS: Semiconductor packages, thermistors

PART NUMBER NOMENCLATURE:

30T-TO-220-02 225	
Length	
Case Number	
Applicable Transistor	
Material Type	• T for SARCON® TR • H for SARCON® HR
Thickness (mm)	• 30T (0.30 ± 0.1) • 45 (0.45 ± 0.05) • 50 (0.50 ± 0.10) • 90 (0.90 ± 0.10)

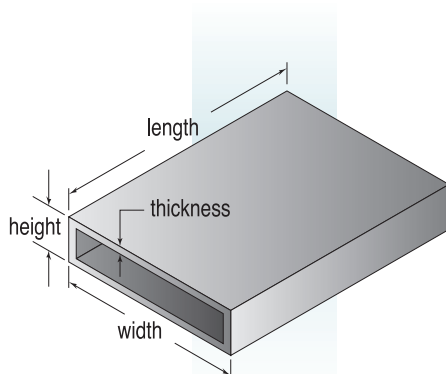

Part Number	Type	Inside Length	Inside Width	Inside Height	Case Thickness
30T-TO-220-02225	TR	22.5	11.0	4.5	0.30
45T-TO-220-01220	TR	22.0	11.0	5.0	0.45
90T-TO-220-01220	TR	22.0	11.0	5.0	0.90
30T-TO-3P-03281	TR	28.1	16.0	4.5	0.30
50T-TO-3P-02275	TR	27.5	16.5	5.0	0.50
90T-TO-3P-01280	TR	28.0	18.0	5.0	0.90
45H-TO-220-01220	HR	22.0	11.0	5.0	0.45
90H-TO-220-01220	HR	22.0	11.0	5.0	0.90
50H-TO-3P-02275	HR	27.5	16.5	5.0	0.50
90H-TO-3P-01280	HR	28.0	18.0	5.0	0.90

SARCON® DIE-CUT GASKETS

Standard die-cut parts. Effective also as a mounting cushion to prevent deformation.
Customs available in unlimited sizes and shapes.

APPLICATIONS: Semiconductor packages and heat sinks

PART NUMBER NOMENCLATURE:

30 T-TO-3 -3

Style (see chart)


Applicable Transistor

Material Type

- T for SARCON® TR
- GTR for SARCON® GTR
- Q for SARCON® QR
- GSR for SARCON® GSR
- GTR-AD for SARCON® GTR w/adhesive
- GHR-AD for SARCON® GHR w/adhesive
- GSR-AD for SARCON® GSR w/adhesive
- H for SARCON® HR
- GHR for SARCON® GHR

Thickness (mm)

- 15 (0.15 ±0.05)
- 20 (0.20 ±0.05)
- 30 (0.30 ^{+0.1/-0.0})
- 45 (0.45 ±0.05)
- 85 (0.85 ±0.05) ¹Not available for GTR and GHR

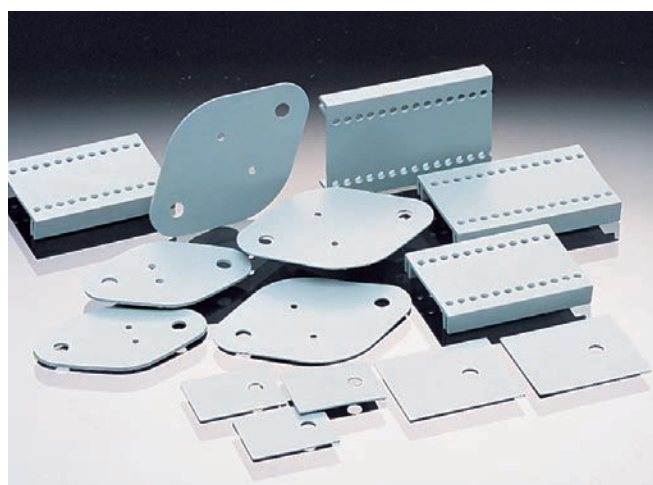

Configuration	Style	A	B	C	D	E	F	G	Lead Holes	Screw Torque
TO-3 2/3 Leads 	-189	1.653 42.00	1.142 29.00	0.122 3.10	0.059 1.50	0.079 2.00				
Plastic Power Devices 	-191 (TO-220)	0.708 18.00	0.512 13.00	0.177 4.50	0.118 3.00					
	-192 (TO-3PF)	0.945 24.00	0.787 20.00	0.295 7.50	0.122 3.10					

CUSTOM OPTIONS AVAILABLE

SELF-FUSING Silicone Rubber Tapes

INSULATION

Self-fusing silicone rubber general purpose class H electrical tape is ideal for insulating or conductive applications where a quick, reliable weather-resistant electrical or hydraulic leak seal is required. The highly elastic material wraps around problem areas, immediately conforming to the applied surface with a tight fitting adhesion. Originally developed for military applications, and now available for general commercial use.

SPECIFICATION: MIL-AA-59163

APPLICATION:

Insulation Type

- Electrical, electronic and general use
- Over-moldings, pottings
- Die-cut gasket
- Replacement of custom insulator pads


By spiral wrapping each successive layer slightly over the previous one, the tape fuses to itself over the component. Bonding only to itself, the permanent fusion begins within three minutes after contact.

Once the amalgamation is cured, the protected area withstands exposure to moisture, electrical and mechanical shock, temperature extremes, UV and ozone without degradation. Accordingly, its use in a wide range of situations, not normally handled by a tape product, is extremely feasible and offers a considerable cost reduction versus otherwise common or alternate methods.

Fusible tape can be substituted anywhere other forms of insulating materials are used; such as, in place of custom die-cut pads, potting compounds and even over-moldings.


Resiliency and long-term aging properties are excellent; applicable in a very wide temperature range from -45°C to +250°C (-49°F to +480°F).

Two profiles are available, rectangular and delta shaped. The rectangular is a typical tape shape is used universally for most applications. The delta shape facilitates spiral wrapping around cables and harnesses by way of its natural tendency to conform in a helix.



PART NUMBER NOMENCLATURE:

FLAT - 5TV - 8 - 1.0 - 50

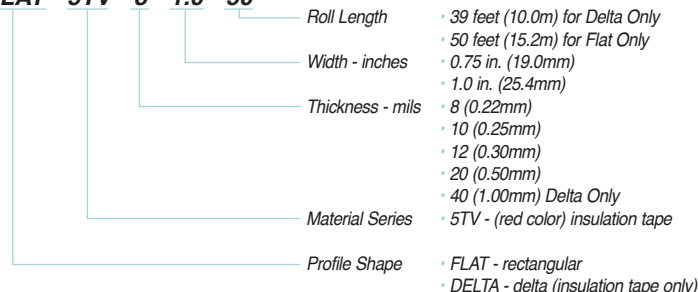

Insulation Tape Part Number	Color	Hardness (Shore A)	Tensile Strength (kg)	Elongation (%)	Tear Strength (%)	Adhesive Force (gr)	Withstand Voltage (AC kV)	Volume Resistivity (Ω-cm)		Typical Thermal Weight Loss (%)	Typical Content Siloxane (wt.%)
								Normal	Moist		
FLAT-5TV-8-.75	red	50±5	> 1.1	> 400	> 100	> 300	> 4.0	1.0x10 ¹⁵	1.0x10 ¹⁰	6.20% 225°C(440°F) x24 Hrs.	D4~D10=0.27 D11~D20=0.40 total=0.67
FLAT-5TV-8-1.0	red	50±5	> 1.5	> 400	> 100	> 400	> 4.0	1.0x10 ¹⁵	1.0x10 ¹⁰		
FLAT-5TV-10-.75	red	50±5	> 1.8	> 400	> 100	> 300	> 4.2	1.0x10 ¹⁵	1.0x10 ¹⁰		
FLAT-5TV-10-1.0	red	50±5	> 2.5	> 400	> 100	> 400	> 4.2	1.0x10 ¹⁵	1.0x10 ¹⁰		
FLAT-5TV-12-.75	red	50±5	> 2.7	> 400	> 100	> 300	> 4.5	1.0x10 ¹⁵	1.0x10 ¹⁰		
FLAT-5TV-12-1.0	red	50±5	> 3.5	> 400	> 100	> 400	> 4.5	1.0x10 ¹⁵	1.0x10 ¹⁰		
FLAT-5TV-20-.75	red	50±5	> 4.5	> 400	> 100	> 300	> 5.0	1.0x10 ¹⁵	1.0x10 ¹⁰		
FLAT-5TV-20-1.0	red	50±5	> 6.0	> 400	> 100	> 400	> 5.0	1.0x10 ¹⁵	1.0x10 ¹⁰		
DELTA-5TV-40-1.0	red	50±5	> 5.6	> 400	> 100	> 400	> 6.0	1.0x10 ¹⁵	1.0x10 ¹⁰		



COEXTRUSIONS

APPLICATIONS:

- RFI/EMI gaskets and shielding
- Electrostatic discharge (ESD)
- Electrical and Electronic parts used in:
 - cameras - computers
 - switches - instrumentation
 - displays - controls

Complex shapes of silicone rubber consisting of different properties such as conductive and non-conductive segments, or color coding. Specifically custom designed to eliminate multiple extruded components by combining different elements into one unitized design.

Quick turnaround and cost-effective tooling preparation for your proprietary needs. For engineering assistance and more detailed information, please contact customer service.



GASKETS AND SEALS

APPLICATIONS:

- Enclosure seals
- O-rings, bonded O-rings
- Tubing
- Complex shapes used in:
 - automotive - architectural - electrical
 - aerospace - marine - hydraulics
 - appliances - medical - manufacturing

High performance, high quality silicone rubber. Available in standard and custom material formulations, extruded to your exact requirements.

Quick turnaround and cost-effective tooling preparations for your proprietary needs. For engineering information, please contact customer service.

DESIGN

Guidelines - All Products


INDEX

Fujipoly electronic packaging components provide the finest performance available. To assure expected long-term results, refer to the following simple guidelines for each product area.

	Page
Glossary of Connector Terminology	38
ZEBRA® Elastomeric Connectors	39-42
ZEBRA® “W” Matrix Connectors	43
SARCON® Thermal Management Components	44-45

GLOSSARY OF CONNECTOR TERMINOLOGY

ASPECT RATIO (AR)	Ratio of ZEBRA® connector height to width. (Aspect ratio of 1.5 and higher is recommended to minimize the amount of force required to deflect the ZEBRA® connector.)
BEZEL	Positioning device designed to surround the LCD edges while applying force to the ZEBRA® connector. Usually the decorative portion of the connector package. Plastic or metal cover placed over the LCD.
BRIDGE	Rib section on a ZEBRA® connector holder serving to reinforce the holder as well as minimize the length of individual ZEBRA® connection spans.
COMPRESSION SET	Amount by which a compressed ZEBRA® connector will not recover to its original height when compression is removed within the prescribed deflection limits. (typical maximum of 25%)
CONNECTOR PITCH	Center-to-center measurement of conductive layers.
CONTACT DENSITY	Number of conductive layers per inch.
DEFLECTION	Difference in original height versus compressed height of connector.
GAP	Space on a PC board or LCD which does not contain contact pads.
HOLDER / RETAINER	Positioning device used to contain the ZEBRA® connector to assure proper alignment between two mating surfaces.
LCD PITCH AND/OR PC BOARD PITCH	Centerline-to-centerline distance between contact pads.
LIP WIDTH	Distance from outside edge of front glass to edge of back glass.
PAD WIDTH	Distance measured edge-to-edge of contact pad (CW).
PAD LENGTH	Distance measured end-to-end of contact pad (CL).
PAD MATERIALS	LCD contact pads are normally indium tin oxide. PC board contact pads may be gold, carbon-coated or solder-coated. Plating methods can result in significant variations in contact pad thickness, but should be kept as flat as possible.
REGISTRATION	Vertical alignment of contact pads between two mating surfaces.
SEPARATION	Distance between two mating surfaces.
STRESS RELAXATION	The function which relates to the loss of back stress of the compressed connector over time. Expressed as a percent of original stress.
TOLERANCE STACK-UP	Minimum and maximum dimensions of separation between LCD contacts and PC board contacts as determined by consideration of tolerance variations in flatness and parallelism of components.

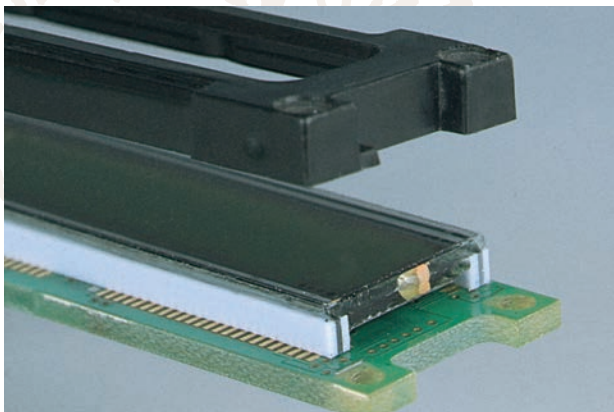


Micro-electronics interconnect packaging applications by their very nature leave a minimum of space in which to assemble mating components. High reliability and very small interconnections, with an ever-increasing number of I/O's, are a must if design objectives are to be met. ZEBRA® connectors can be found in most product types of this nature, and continue to gain wider acceptance as product packages decrease in size. Since each style consists of integral conductors, insulators and self-support structures, there is generally no added componentry required for installation – thus a very important by-product of hardware and installation cost-effectiveness can be realized.

AS EASY AS 1...2...3: Using ZEBRA® elastomeric electronic connectors requires only a brief orientation in order to assure that the components provide the finest performance possible. The basic design steps consist of:

1. Layout of your package
2. Select the proper connector and size
3. Design the bezel or retainer

DESIGN FEATURES AND CHARACTERISTICS

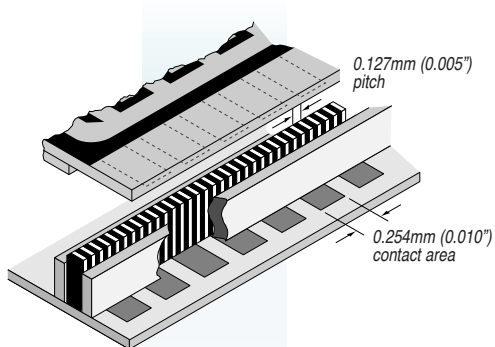

ZEBRA® connectors are composed of alternating layers of conductive and non-conductive silicone rubber. Contact density of the ZEBRA® connector is greater than the contact pad density of either the LCD or PC board, making it an ideal design choice. When placed between the LCD and PC board at least one conductive layer will connect matched contact pads and at least one insulating layer will isolate adjacent circuits.

SOLDERLESS CONNECTIONS NON-ABRASIVE CONTACTS

Pressure type contact eliminates lead straightening, hole drilling and soldering. (Zero insertion force) Contact to the LCD is made by deflecting the ZEBRA® connector between the LCD and PC board. ZEBRA® connectors are non-abrasive and will not damage indium oxide contact pads on the LCD. Repeated assembly and disassembly of package components will not affect performance.

ENVIRONMENTAL RELIABILITY

The LCD, when mounted with a ZEBRA® rubber connector, creates a gas tight seal at the contact interface. Assures contact in chemically corrosive atmospheres while at the same time protecting the glass display from shock and vibrations.

SMALL GLASS OVERHANG

With a ZEBRA® connector, LCD terminal overhangs can be as narrow as 0.030"/8mm permitting more efficient use of glass size related to character height. (Metal pins normally require a 0.150"/3.9mm glass overhang, reducing character height by as much as 0.240"/6.1mm for a dual in-line LCD.)

HIGH DENSITY CONTACT

ZEBRA® connectors are available in a variety of contact densities. The most dense allows contact pad spacing as close as 0.010"/0.25mm center-to-center. This spacing can be compared to 0.050"/1.3mm minimum for pins, allowing for increased capacity of LCD formats.

TEMPERATURE RANGE

-55° TO +260° F/-50° C TO +125° C (-60° TO +125° C available on request)

CURRENT CARRYING CAPACITY

40 amps per square inch of contact pad. (0.050A for .035 x .035 pad)

CONNECTION RESISTANCE

Typically 500 to 2,500 ohms.

INSULATION RESISTANCE

Typically 10¹² ohms.

DEFLECTION FORCE REQUIRED

1.5 pounds per linear inch for a 0.020" wide ZEBRA®.


LIFE

100,000 hours minimum.

CONDUCTIVE LAYERS

up to 500 per inch.

PHYSICAL AND ELECTRICAL MEASUREMENTS - NOMINAL

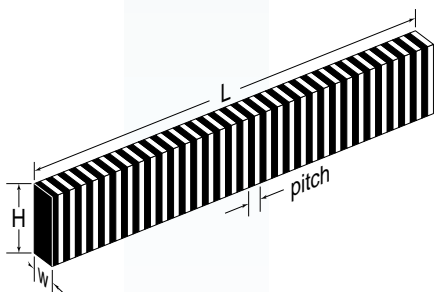

DIMENSIONS - The above figure shows the dimensions of the ZEBRA® connector. For best overall performance ZEBRA® connectors should be designed with an aspect ratio of H/W equal to or greater than 1.5.

MECHANICAL - FORCE DEFLECTION - Recommended deflection is 5% to 25% of the height (H) dimension. To calculate F (force in pounds) for deflection the following formula may be used:

For Carbon ZEBRA®s

$$\text{Metric: } F = 9 \times D \times W \times L \times 9.8 \times 10^3$$

Inches:

$$F = 5806 \times D \times W \times L \times 9.8 \times 10^3$$

For Silver ZEBRA®s

$$\text{Metric: } F = 10.0 \times D \times W \times L \times 9.8 \times 10^3$$

Inches:

$$F = 6452 \times D \times W \times L \times 9.8 \times 10^3$$

Where:

F = Force (N)

$$D = \frac{H - H_1}{H}$$

H = Height of connector (mm or inches)

H₁ = Deflected height of connector (mm or inches)

W = Width of connector (mm or inches)

L = Length of connector (mm or inches)

RESISTANCE - To calculate the resistance of ZEBRA® connectors, choose one of the following formulas:

For Carbon ZEBRA®s

$$\text{Inches: } R = \frac{2.37 \times H}{E_W \times W} = \text{ohms}$$

Where: E_W = Electrode pad width (in)
W = Connector width (in)
H = Connector height (in)

$$R = \frac{60 \times H}{C_W \times W} = \text{ohms}$$

Metric:

Where: E_W = Electrode pad width (cm)
W = Connector width (cm)
H = Connector height (cm)

For Silver ZEBRA®s

$$\text{Inches: } R = \frac{H \times 0.0004}{W \times E_W} + 0.10 = \text{ohms}$$

Where: W = Width of ZEBRA® (in)
E_W = Electrode pad width (in)
H = Height of ZEBRA® (in)

$$R = \frac{H \times 0.01}{W \times E_W} + 0.10 = \text{ohms}$$


Metric:

Where: W = Width of ZEBRA® (mm)
E_W = Electrode pad width (mm)
H = Height of ZEBRA® (mm)

ENVIRONMENTAL SEALING

The ZEBRA® connector will provide a gas tight seal. Adverse effects of temperature, shock and vibration, atmospheric corrosion as well as harsh chemical environments will not affect LCD or PC board contacts, when sealed through use of a ZEBRA® connector.

Design Guidelines - Connectors

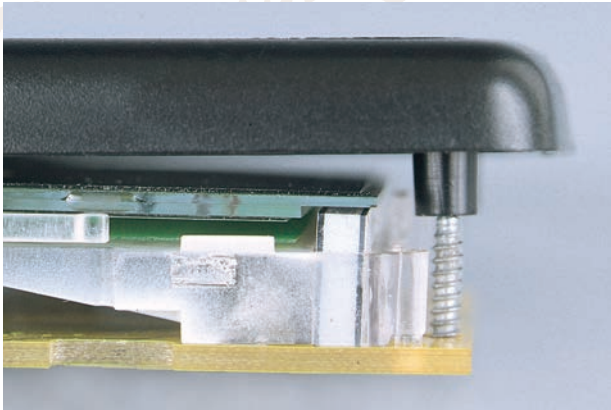


1. LAYOUT OF YOUR PACKAGE:

Shown at left is a typical LCD-to-printed circuit board interconnect using ZEBRA® elastomeric connectors in a cellular telephone handset. The components are stacked and consist of only three items to be addressed:

- **Liquid Crystal Display (LCD)**
- **ZEBRA® connector**
- **Printed Circuit Board (PCB)**


It is essential that contact mating characteristics be kept as similar to the other components as possible. Any factors restricting positive contact interface should be compensated for in the design. Some of these are as follows:

1.1 PRINTED CIRCUIT BOARD DESIGN CONSIDERATIONS

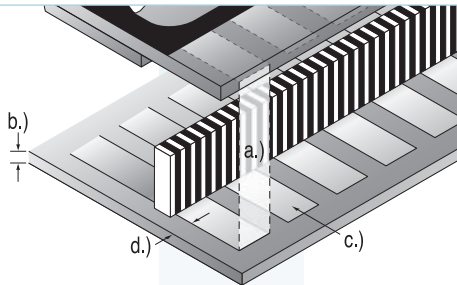


- a.) **Registration of contact pads** between the LCD and PC board is critical in effecting contact. Contact pads of both should ideally be of the same size and equally matched in tolerances for width and pitch.
- b.) **Consider carefully PC board thickness** and the related flatness tolerances. Proper design should involve the control of "waviness" tolerances and board stiffness. Both elements are essential in the appropriate design and selection of the ZEBRA® connector. Connector deflection and width are important considerations in determining the size of the ZEBRA® connector to be used in order to maintain proper deflection without "bowing" the PC board.
- c.) **Contact pad material** on the PC board, as well as the LCD, should be smooth and regular with thickness tolerances established.
- d.) **Consider the area on the PC board** to be dedicated to the LCD and the presence of neighboring components. Location of the LCD above or on the PC board should permit free clearance on all four sides of the PC board profile of at least 0.250"/6.2mm for packaging and/or fastening.

1.2 LCD DESIGN CONSIDERATIONS

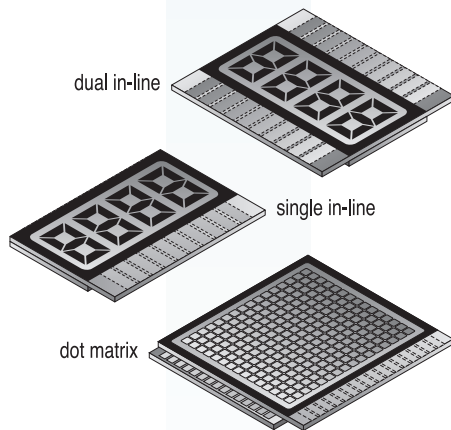


- a.) **Select LCD configuration**, e.g., Single In-Line (SIL); Dual In-Line (DIL); or contacts on both planes. Example: Dot Matrix.
- b.) **Select an LCD** which in its design has contact pads on the reverse side of the viewing area (facing PC board). For those instances where contact pads cannot be stationed facing the PC board, a custom elastomer may be required.
- c.) **Pitch** of LCD contact pads.
- d.) **Length, width, and thickness** of combined front glass and back glass of LCD.
- e.) **Determine lip width** (distance from outside edge of front glass to edge of back glass). This dimension should be at least 0.060"/1.5mm and preferably 0.100"/2.5mm. Ideally, contact pads should extend to the outer edge of the lip on the glass.

1.3 CALCULATING THE SEPARATION FACTORS

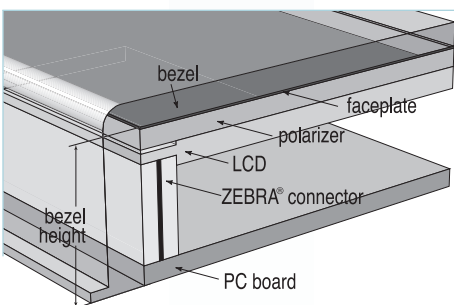

Consideration must be given to tolerance control on the elements that comprise the connector package. There are separate flatness and parallelism tolerances for the LCD glass, polarizers, reflectors and PC board. Materials used for the contact pads of the LCD and contact pads of the PC board also have thickness variations which must be considered. Flatness of the PC board and parallelism between the components are also factors. These tolerance values are vital criteria in determining separation variations between the LCD and PC board. The sum of the tolerances of these elements plus nominal separation determine the height (H) of the connector which will meet your design application.

ZEBRA® Design Guidelines - Connectors

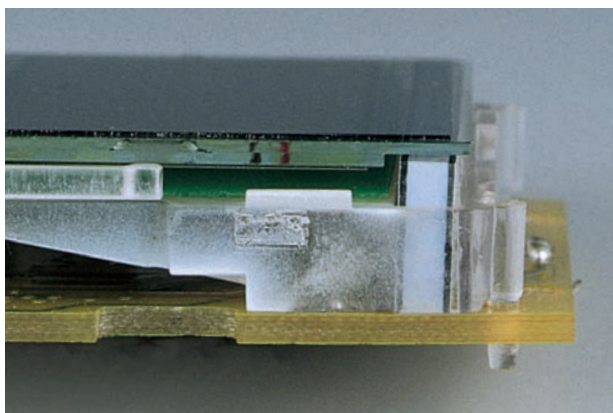


2. SELECT THE CONNECTOR AND SIZE

ZEBRA® elastomeric connectors offer a wide variety of application possibilities, in many cases where no other type of interconnect device is possible. They require a minimum of installation hardware considerations, allowing for very small packaging structures to support low profile display and microelectronic interfacing.


When properly dimensioned, long-life performance can be assured and gas-tight connections without additional precautions can be realized.

2.1 CONNECTOR PITCH AND LENGTH

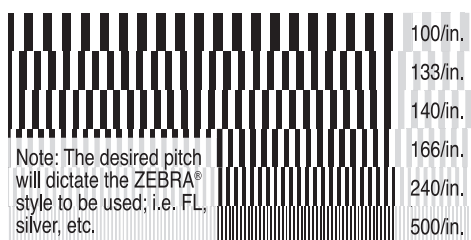

- Select a ZEBRA® connector that will assure that at least one conductive layer connects between contact pads**, for example, of an LCD and PC board to be interconnected, and at least one insulating layer is between adjacent contact pads.
- ZEBRA® connectors can accommodate** applications with contact spacing of .010"/.254 mm center-to-center or greater.
- The overall length** should extend a minimum of 0.020" beyond the edge of the contact at each end of the connector.


2.2 CONNECTOR HEIGHT

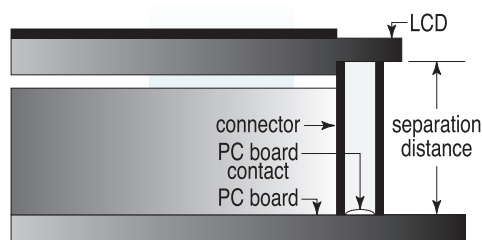

- ZEBRA® connector height** is determined by the separation distance between LCD and PC board contact pads, including tolerance variations. ZEBRA® connectors can be supplied with a height of up to 1"/25mm.
- ZEBRA® connector height** is the most critical dimension in determining the functional performance of the connected components. Calculate the tolerance stack-up of the PC board, LCD, polarizer, and ZEBRA®. Multiply the maximum separation distance by 1.10 (adding 10% to separation distance) to establish uncompressed ZEBRA® connector height.
- The following example** shows calculations used in determining uncompressed ZEBRA® connector height.


Example: Separation distance in this application equals 0.200"/5.08mm with tolerance of +/- 0.005"/0.13mm representing the tolerance stack-up from one end of the LCD and PC board separation to the other end. The minimum separation in our application equals 0.195"/4.9mm; the maximum separation equals 0.205"/5.2mm. Multiply the maximum separation of 0.205"/5.2mm by 1.10 to develop the uncompressed ZEBRA® connector height. The resulting 0.225"/5.7mm uncompressed height of ZEBRA® connector is the correct ZEBRA® connector height to assure adequate contact and achieve the minimal 0.195"/4.9mm separation for assembled height of the LCD, PC board package, and to insure contacts in areas where the minimum separation of 0.195"/4.9mm prevails. To achieve the 0.200"/5.08mm assembled height, it is necessary to deflect the 0.225"/5.7mm free height ZEBRA® connector by 10%. The design result falls within the 5%-25% deflection range recommended for effective ZEBRA® connector contact.

2.3 CONNECTOR WIDTH

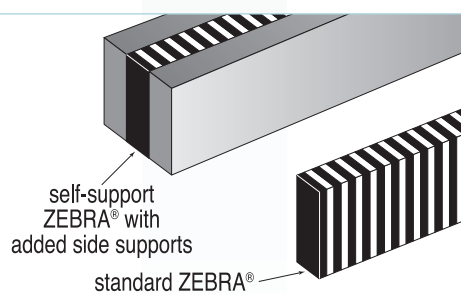

- Force deflection** considerations of the ZEBRA® connector (Refer to Force Deflection formula) result in a recommendation of 0.025"/0.6mm as the width for connectors of lengths between 0.25"/6mm and 2.5"/63.5mm. Continuous connector spans of 2.6"/66mm to 8"/203mm require a minimum 0.035"/0.9mm wide connector to allow easy assembly of the ZEBRA® connector into the slot of a holder. Ideally, the ZEBRA® connector length should be limited to 2.5"/63.5mm due to possible insertion difficulties of the connector in the slot of the holder.
- ZEBRA® connectors with a width of 0.025"/0.6mm to 0.035"/0.9mm** require the use of a holder. (See design of ZEBRA® connector holder.) Fujipoly offers standard self-supporting ZEBRA® connectors eliminating the need for fabricating a holder for heights up to 0.200"/5.08mm.

Design Guidelines - Connectors

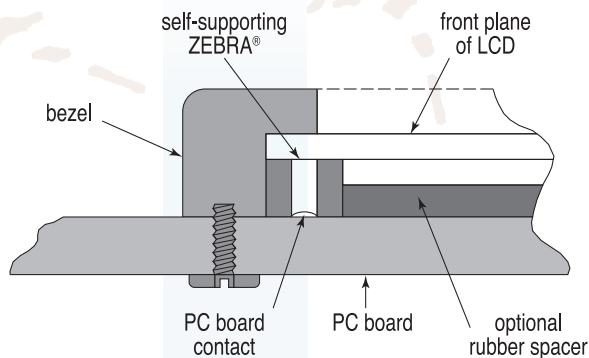

3. DESIGNING THE CONNECTOR HOLDER


Once the ZEBRA® style and design have been decided upon, two last considerations should be resolved; namely:

- Support of the ZEBRA® connector in its operating position
- Application of pressure onto connector height dimension to cause deflection and proper contact to the conductive contact pads.

The most common alternatives are among the following:

- **A Self-Supporting ZEBRA® connector**
- **A Custom Holder - for your specific configuration**
- **Clamping or fastening devices**

3.1 STANDARD SUPPORTED SIZES

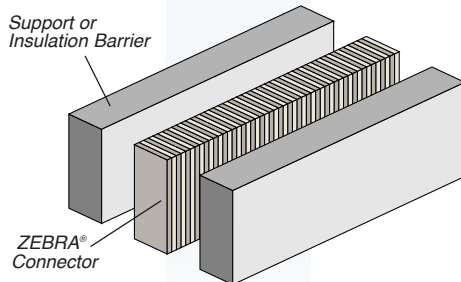


The supported connector typically contains a thin elastomeric 0.020"/.51mm wide strip attached to either one or both sides. It is a sponge or solid silicone rubber support medium which allows a lower compression force over a wide range while also providing a greater width-to-height ratio. Thus, the free-standing stance is more stable, especially as compression is introduced.

Carbon and Silver Filled Standard Dimensions (in./mm)

	min.	max.
width	0.050/1.27	0.157/3.44
height	0.050/1.27	1.000/25.4
length	0.250/6.35	9.000/229.0 carbon; 5.000/127.0 silver

3.2 DIMENSIONING A STANDARD OR CUSTOM CONNECTOR HOLDER

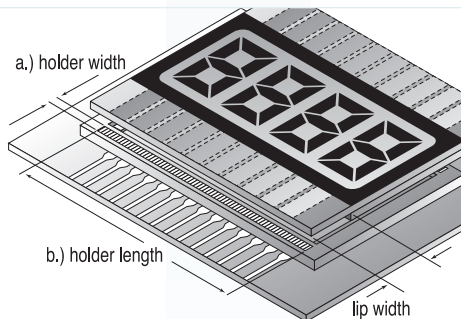

a.) **Holder/Retainer width:** Determine LCD lip width as well as clearance on the PC board allowed to accommodate the LCD.

b.) **Holder length:** Holder should extend a minimum of 0.1"/2.5mm beyond the edges of the front of the glass of the LCD and/or the PC board pad lengths in order to provide support, and proper positioning and placement of aligning pins of the holder. Where wall thickness of the holder must be thin and length of contact area is in excess of 2.5"/63.5mm, it may be necessary to provide a bridge or separator in the holder slot at 2.5"/63.5mm intervals, or the wall thickness of the frame on either side of the slot must be adequate to inhibit inward "bowing". Design considerations should preclude such bridges or separators from interfering with the contacts designed to be between LCD and PC board.

The difference between slot width and ZEBRA® width should be approximately 0.005"/0.13mm to allow for easy insertion and removal.


c.) **The following design considerations should be evaluated:**

Plastic Holders: Reinforced plastic is preferable because it affords superior physical and electrical design properties. Temperature range of LCD should be consistent with temperature specifications of plastic selected. Chamfer the slot in the holder as shown in the illustration. Add 0.005"/0.13mm to the width of the slot for insertion of the ZEBRA® connector. Allow a minimum of 0.050"/1.3mm wall thickness or greater as height approaches 0.150"/3.8mm/ Locating pins should be molded to bottom of ZEBRA® connector holder to provide registration between LCD and the PC board contacts. See Figure #1.

Metal Holders: In designing metal holders, specify an insulating barrier or supports on the sides of the ZEBRA® connector to assure electrical insulation to eliminate shorting, etc.

Locating pins: Should be provided on the ZEBRA® connector holder to provide registration between LCD and PC board contacts. Check with the LCD manufacturer regarding the glass seal in designing either plastic or metal holders. Provide room in the ZEBRA® connector holder for the seal. Provision should be made to accommodate loose polarizers and reflectors if such elements are included in the design.


3.3 DESIGNING THE BEZEL

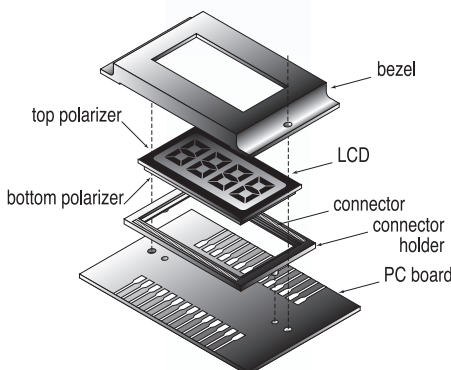

In determining design requirements for the bezel, specific design elements should be considered:

- Using separation distance factors,** determine required height of the bezel. Length and width of the LCD plus holder tolerances will establish length and width dimensions.
- Must the LCD be protected?** If so, the bezel should incorporate a cover element.
- Is sealing required** to prevent dust and/or moisture intrusion? Under what environmental conditions will the LCD be expected to function?
- What is the LCD viewing area?** Be sure that bezel edges do not interfere.
- Is masking required** for any portion of the LCD viewing area?
- Can the housing or case of the end product be used to provide the necessary pressure** and protection required for the LCD/PC board connection? If so, a bezel may not be necessary.
- Will there be a need for clamps or fasteners?** Consult Fujipoly as a design reference source for bezel configurations.

Design Guidelines - "W" Matrix Connectors

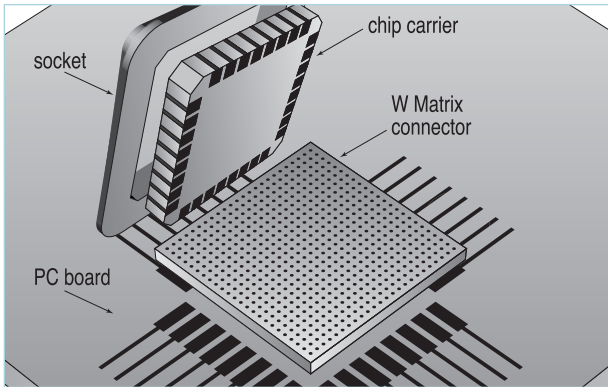


The ZEBRA® W series elastomeric connectors are highly accurate silicone rubber pads with fine metal wires embedded in the thickness direction. The wires are gold-plated, providing low resistance and relatively high current flow with anisotropic conduction properties.

Standard pitch patterns offer dense I/O's at closely positioned centerlines. To specify the appropriate design layout for your application, the following simple steps are recommended:


1. Determine the pitch
2. Decide if interconnect is static or repeated compressions
3. Specify overall dimensions

1. DETERMINING IF THE APPLICATION IS STATIC OR REQUIRES REPEATED COMPRESSIONS

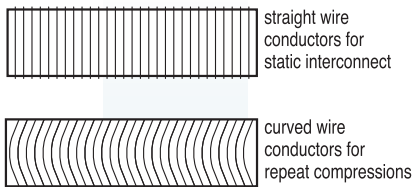


- a.) **Static interconnect** between mating conductors use the WSL (1.0mm pitch) or WSC (0.35mm pitch) versions. The fine wire conductors protrude slightly from both top and bottom of the silicone rubber to ensure contact with conductors under just very slight pressure (about 10% compression).
- b.) **Repeated compression interconnects** such as testing pads use the WBC (0.35mm pitch) version containing curved conductors with spring properties which allow the connector to recover to original height without compression set after repeated deformations.

2. DETERMINE PITCH REGISTRATION

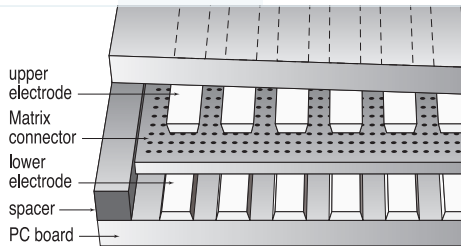

- a.) **Pitches available:** 1.0mm and 0.35mm for "W" series; and, 1.0mm, 0.8mm and 0.5mm for "P" series
- b.) **Select the pitch** which assures that at least one conductor connects between the contact pads to be mated, and that at least one insulating area is between adjacent contact pads.
- c.) **If redundant contact is desired**, select the pitch that assures at least two conductors connect between the contact pads to be mated and at least one insulating layer is between adjacent contact pads.

3. DETERMINE EXTERIOR DIMENSIONS

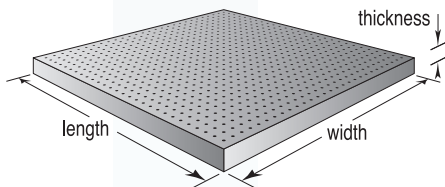


- a.) **Length** - allow an additional 0.5mm (.020") beyond the edge of the conductor at each end of the row in the length direction. Maximum length is 40.0 mm
- b.) **Width** - allow an additional 0.5mm (.020") beyond the edge of the conductors at each end of the row in the width direction. Maximum width is 20.0 mm
- c.) **Thickness** - two thicknesses are available for each style of "W" connector: 0.5 and 1.0mm. Allow 10% compression of original height to achieve reliable contact. Consider using a compression stop spacer (see drawing) to control compressed height. More than 20% compression is not recommended.

REFERENCE - TYPICAL ENVIRONMENTAL TESTING CHARACTERISTICS

Test	Method	Description	Connector Results		
			Live Current	Embedded in Circuit No Current	Not Embedded No Current
Accelerated Moisture Resistance	MIL-202D-106c	Test cycle: -20°C/23°C/65°C, 95% RH, 1 Test cycle/day x 10 days	—	No change	No change
Moisture	MIL-202D-103B	40°C @ 95% R.H. Continuous 1500 hours	No change	No change	No change
Thermal Shock	MIL-202E-107D	Test cycle: -65°C/25°C/150°C/25°C, 5 cycles	—	No change	No change
SO₂ Gas Corrosion	MIL-IEC-68-2-42	SO ₂ gas, 25PPM, 25°C 75% RH, 21 days	—	No change	0.20/0.35 Ω-mm ²
Thermal Resistance	MIL-202D-108A	120°C, 500 hours	—	No change	No change

Design Guidelines - Thermal Management

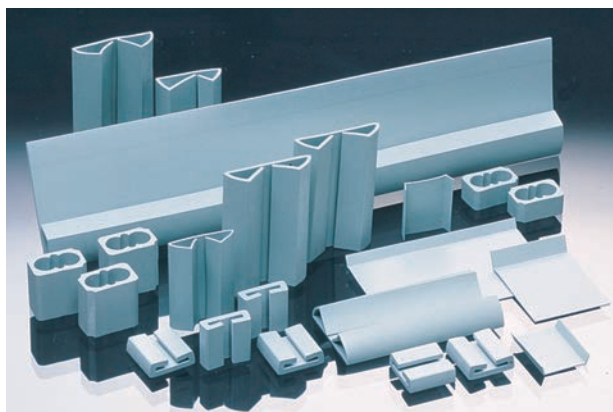


SARCON®'s versatility in thermal management applications is doubly enhanced by way of the variety of end-use configurations possible, and the many standard material formulations available in each.

The silicone rubber based materials offer other useful elements such as electrical insulation, protective coverings and gasketing as integral features in most designs.


Along with a few simple recommendations to help in obtaining the optimum performance for your application, a few suggestions are included which may help you to take advantage of some of these other features.

1. THERMAL TRANSFER

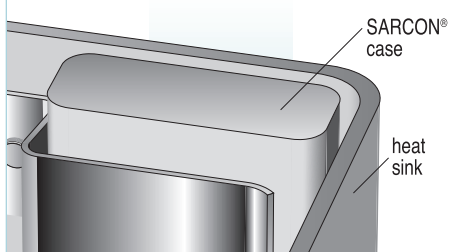


- a.) **Consider the most efficient SARCON® materials regarding thermal conductivity.** See charts on pages 14 and 15.
- b.) **Take advantage of the heat transfer characteristics** of any nearby sheet metal components by using the SARCON® component as a thermally conductive bridge from the heat generating component to the sheet metal. See drawing at left.

2. DUAL FUNCTIONALITY

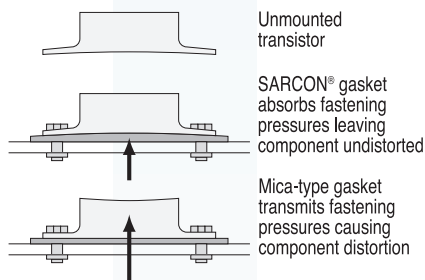


- a.) **Use the SARCON® component also as a functional gasket,** seal cushion, insulator or protective cover. See sketch at left for seal cushion application
- b.) **Vibration dampening and environmental sealing** against outside contaminants can be included in the design elements.
- c.) **Choose from many related product configurations** shown on pages 16 to 31.
- d.) **Custom shapes** can be arranged if your design requires a specific treatment.

3. ATTACHMENT

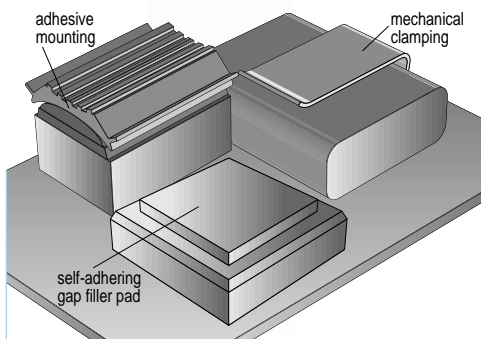

- a.) **No special preparations** are necessary to attach the SARCON® component
- b.) **Some of the most common alternatives include:**
 - pressure sensitive adhesive
 - silicone adhesive
 - mechanical clamping
 - hardware attachment - screws, rivets
 - self-adhering silicone gel
- c.) **Consider using the self-adhering SARCON® Gap Filler Pads** shown on pages 16 to 26 of the catalog product section.
- d.) **Note also that SARCON® is very elastic,** providing a very tight fit over uneven surfaces. This eliminates the need for gap-filling agents in order to achieve high rates of thermal dissipation without variation. The sleeves and cases shown on page 32 of the catalog can be designed as an interference fit which can slip snugly over appropriately configured components.

4. CLAMPING TORQUE

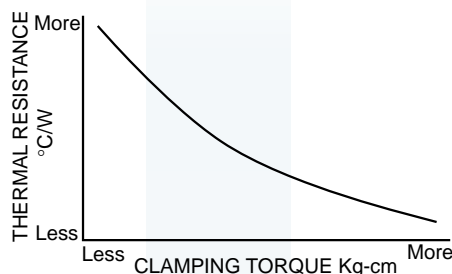

a.) Clamping torque of the installed **SARCON®** material will decrease the thermal resistance as the torque is increased.

See the chart below for specific measurements of each type of **SARCON®** material.


b.) Test method: Fujipoly Test Method FTM P-3010 (ASTM D5470 Equivalent)

CLAMPING TORQUE VS. THERMAL RESISTANCE - TYPICAL

		Thermal Resistance at Various Forces		
SARCON® Type		3kg·cm	5 kg·cm	7 kg·cm
TR	30T	0.65	0.62	0.59
	45T	0.76	0.73	0.71
	85T	1.37	1.35	1.32
HR	30H	0.44	0.42	0.39
	45H	0.54	0.52	0.51
	85H	0.73	0.76	0.74
QR	30Q	0.61	0.57	0.52
	45Q	0.83	0.77	0.71
	85Q	1.42	1.25	1.18

		Thermal Resistance at Various Forces		
SARCON® Type		3kg·cm	5 kg·cm	7 kg·cm
GTR	15GTR	0.58	0.51	0.50
	20GTR	0.60	0.56	0.54
	30GTR	0.68	0.66	0.64
GHR	15GHR	0.58	0.55	0.53
	20GHR	0.61	0.57	0.54
	30GHR	0.67	0.61	0.59
GSR	20GSR	0.31	0.30	0.30
	30GSR	0.37	0.34	0.33
	45GSR	0.40	0.39	0.37
	85GSR	0.52	0.51	0.50

5. SARCON® SILICONE PUTTY

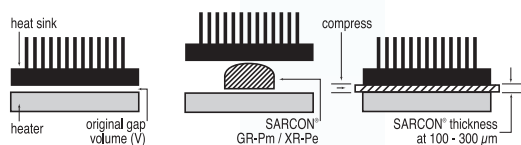

a.) **SARCON® Silicone Putty** shown on page 24 is a highly conformable, non-flammable thermal interface material with a very low compression rate.

b.) Suitable for gaps as small as 0.3 mm or less. See application guide at left.

c.) Calculate size and volume to be used as follows:

Example:

$$\sqrt{V \div \text{thickness}}$$

Compressed thickness: 0.2mm
Component size: 15mm x 15mm

$$V = 0.2 \times 15 \times 15$$

$$V = 45\text{mm}^3$$

$$\sqrt{45\text{mm}^3 \div 2.0\text{mm original thickness}}$$

4.74mm (Use 5.0mm x 5.0mm) @ 2.0mm thickness

FUJIPOLY® LOCATIONS

Fuji Polymer Industries Co., Ltd.

Overseas Department
175 Kajiyashiki
Toyota, Aichi 4700533 JAPAN
tel: 81-565-65-1729 fax: 81-565-65-1857
e-mail: fujipoly@mx.fujipoly.co.jp
ISO9001 (Aichi Plant)

Fujipoly America Corp.

900 Milk Street
P.O. Box 119
Carteret, NJ 07008-0119
tel: 732.969.0100 fax: 732.969.3311
e-mail: info@fujipoly.com
web: www.fujipoly.com
ISO9001-2008

**Fujipoly (Thailand) Co., Ltd.**

55/8 Moo 13 Navanakorn Industrial Estate Phase 4
Phaholyothin Road, Klong Nueng, Klong Luang
Pathumthanee 12120 Thailand
tel: 66-2-529-2732 fax: 66-2-529-2223
e-mail: marketing@fujipoly.co.th
ISO9001 ISO14001

Fujipoly Europe Ltd.

Avant Business Centre, Unit 8
Third Avenue
Bletchley, Milton Keynes MK1 1DR U.K.
tel: 44-1-908-277800 fax: 44-1-908-277900
e-mail: sales@fujipolyeurope.co.uk

Fujipoly Singapore Pte, Ltd.

1001 Jalan Bukit Merah #02-17/20
Singapore 159455
tel: 65-6272 3766 fax: 65-6272 3577
e-mail: info@fujipoly.com.sg
ISO9001

Fujipoly Hong Kong Ltd.

Unit F & J, Block 1,4/FI.
Kwai Tak Industrial Centre
15-33 Kwai Tak Street, Kwai Chung, N.T., Hong Kong
tel: 852-24283770 fax: 852-24899637
e-mail: info@fujipoly.com.hk

**Fujipoly Malaysia Sdn.Bhd.
(Malaysia Factory)**

Plot 26, Phase 4, Free Industrial Zone,
Hilir Sungai Keluang 3,
Bayan Lepas Penang, 11900 Malaysia
e-mail: info@fujipoly.com.my

Fujipoly China Ltd. (China Factory)

Gaobao Road, The First Industrial Park
Tutang Estate, Changping Town, Dongguan City,
Guangdong, 523581, China
tel: 86-769-83989660 fax: 86-769-83989662
e-mail: info@fujipoly.com.hk
ISO9001 ISO14001

Fuji Polymer Industries Co., Ltd.

Taipei Liaison Office
Room B, 7F., No. 59, Tiansiang Rd.
Jhongsan District
Taipei City 10452, Taiwan
tel: 886-2-2586-5771 fax: 886-2-2586-5745
e-mail: fujipolytw@fujipoly.com.tw

FUJIPOLY® DISTRIBUTORS

France Compelma S.A.S.

Z.A. des GODETS
33, rue des petits ruisseaux
91370 VERRIÈRES LE BUISSON
France
tel: +33 (0)1 69 75 21 21 fax: +33 (0)1 60 11 40 19
e-mail: info@compelma.com
web: www.compelma.com

Belgium & Netherlands**MAVOM N.V.**

Molenberglei 14
2627 Schelle
Belgium
tel: +32 (0)3 880 07 60
fax: +32 (0)3 880 07 80
e-mail: info@mavom.be
web: www.mavom.be

MAVOM B.V.

Handelsweg 6
2404 CD Alphen aan den Rijn
Netherlands
tel: +31 (0)172 436361
fax: +31 (0)172 420310
e-mail: info@mavom.nl
web: www.mavom.nl

Italy Murata Elettronica S.p.A

Via S. Carlo, 1
20040 Caponago-MI
Italy
tel: +39 (0)2 95968 1 fax: +39 (0)2 95968 353
e-mail: info@murata.it
web: www.murata.eu

Germany Nucletron Technologies GmbH

Gaertnerstr. 60
80992 Muenchen
Germany
tel: +49 89 14 90 02-0 fax: +49 89 14 90 02-11
e-mail: info@nucletron.de
web: www.nucletron.de

UK Osco Limited

Avant Business Centre, Unit 6
Third Avenue
Bletchley, Milton Keynes MK1 1DR U.K.
tel: +44 (0)1908 376 688 fax: +44 (0)1908 379 916
e-mail: sales@osco.uk.com
web: www.osco.uk.com

Sweden Promoco Scandinavia AB

tel: +46 (0)8 792 06 90 fax: +46 (0)8 792 20 90
e-mail: info@promoco.se
web: www.promoco.se

Denmark Newtronic ApS

tel: +45 7669 7090 fax: +45 7627 7090
e-mail: nr@newtronic.dk
web: www.newtronic.dk

Turkey Mechsoft

tel: +312 482 59 49 fax: +312 482 54 39
e-mail: gokhan.erdogdu@mechsoft.com.tr
web: www.mechsoft.com.tr

Spain Nufesa Electronics

tel: +34 93 340 50 25 fax: +34 93 352 88 46
e-mail: comercial@nufesa.com
web: www.nufesa.com

Israel Elimec

P.O. Box 5006
1 Lishanski Street
Rishon LeZion, 75150 Israel
tel: +972 3 951 41 22 fax: +972 3 951 41 66
e-mail: mail@elimec.co.il
web: www.elimec.com

India Metrocomp India Pvt Ltd.

115H Pocket 4
Mayur Vihar, Phase I, Delhi 110091
India
tel: +91 11 2279 1042
fax: +91 11 2275 9870
e-mail: venkat@metrocompindia.com



ZEBRA® and SARCON® are registered trademarks of Fujipoly®

STATEMENT OF LIEU OF WARRANTY: All technical information and data in this document is based on tests and is believed to be accurate and reliable. Nevertheless, since the products described herein are not provided to conform with mutually accepted specifications and the use thereof is unknown, the manufacturer and seller of the product do not guarantee results, freedom from patent infringement, or suitability of the product for any application thereof. The manufacturer and seller of the product described in this document will provide all possible technical assistance and will replace any products proven defective. No statement or recommendation made by the manufacturer or seller not contained herein shall have any force of effect unless in conformity with an agreement signed by an officer of the seller or manufacturer. Product testing by the purchaser is recommended in order to confirm expected results. Copyright© 2012 Fujipoly®

FUJIPOLY.COM



an ISO9001:2008 registered company

***A Global Network To Serve All Your
Thermal Interface Material and Elastomeric Connector Needs.***

Japan USA Thailand Europe Singapore Hong Kong China Taiwan Malaysia

1113500